



**DEWMARK
HEAVY**

SV 41/50

Joint width
50 mm

Recess
mounted

Max load
100 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

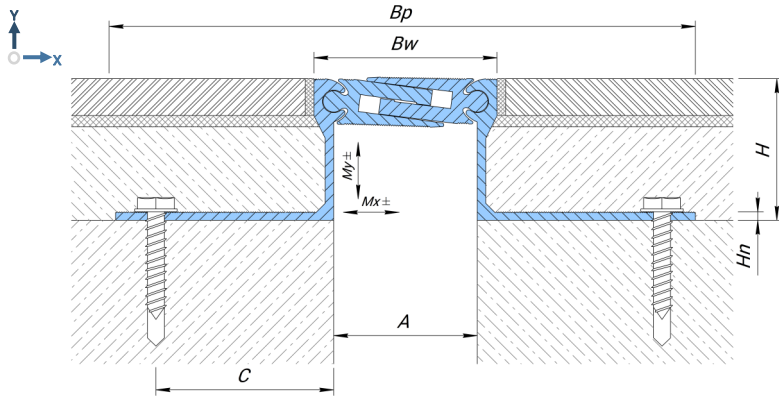

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 41/50/16	50	65	180	16	2,3	50	14 (+7/-7)	10 (+5/-5)	50 ¹	70 ¹	50 ¹	-
SV 41/50/20	50	65	199	20	3	60	14 (+7/-7)	10 (+5/-5)	50 ¹	70 ¹	70 ¹	-
SV 41/50/25	50	65	195	25	3	60	14 (+7/-7)	10 (+5/-5)	50 ¹	100 ¹	70 ¹	5 ¹
SV 41/50/34	50	65	205	34	3	60	14 (+7/-7)	10 (+5/-5)	50 ¹	100 ¹	70 ¹	5 ¹
SV 41/50/50	50	65	203	50	3	60	14 (+7/-7)	10 (+5/-5)	50	100	70	5
SV 41/50/70	50	65	200	70	3,5	60	14 (+7/-7)	10 (+5/-5)	50	100	70	5
SV 41/80/80	50	65	204	80	3,5	60	14 (+7/-7)	10 (+5/-5)	50	100	70	5
SV 41/50/100	50	65	200	100	4	60	14 (+7/-7)	10 (+5/-5)	50	100	70	5
SV 41/50/120	50	65	200	120	4	60	14 (+7/-7)	10 (+5/-5)	50	100	70	5
SV 41/50/150	50	65	208	150	4,5	60	14 (+7/-7)	10 (+5/-5)	50	100	70	5

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 41/50/50

