



**DEWMARK
HEAVY**

SV 45/160



Joint width
160 mm



Recess
mounted



Max load
600 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

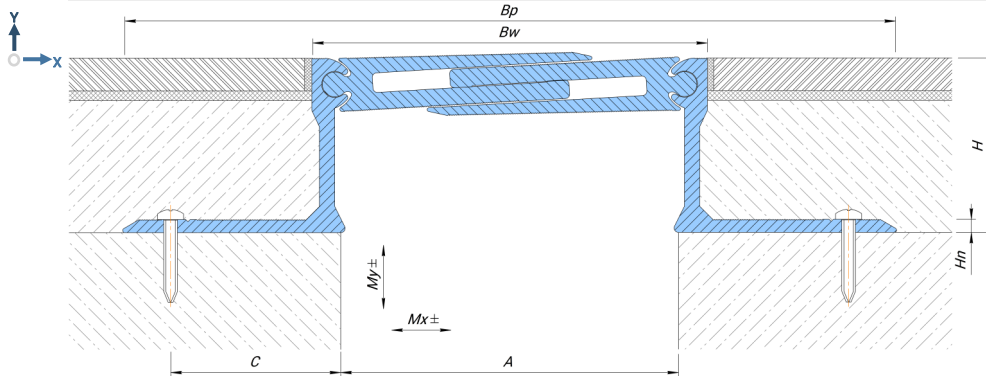

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 45/160/53	160	180	375	53	5	75	70 (+35/-35)	70 (+35/-35)	50	600	100	30
SV 45/160/80	160	180	355	80	6	75	70 (+35/-35)	70 (+35/-35)	50	600	100	30


On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide. This profile is denoted by the index "E":
example SV-E 45/155/80

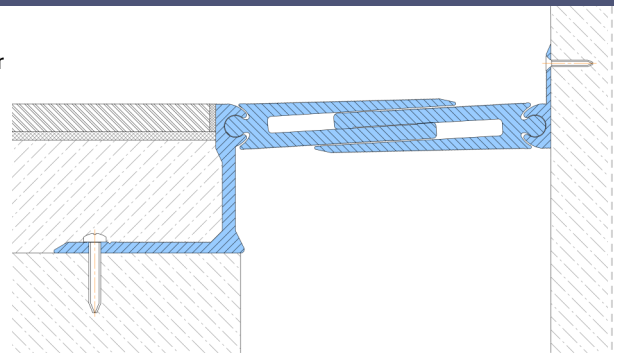

! For corner versions, only pedestrian loads are allowed.