



**DEWMARK  
HEAVY**

**SV 44/50**

Joint width  
50 mm


Top  
mounted

Max load  
30 kN


Movements in  
3 directions

Protection  
rating IP 30

Indoor/  
outdoor

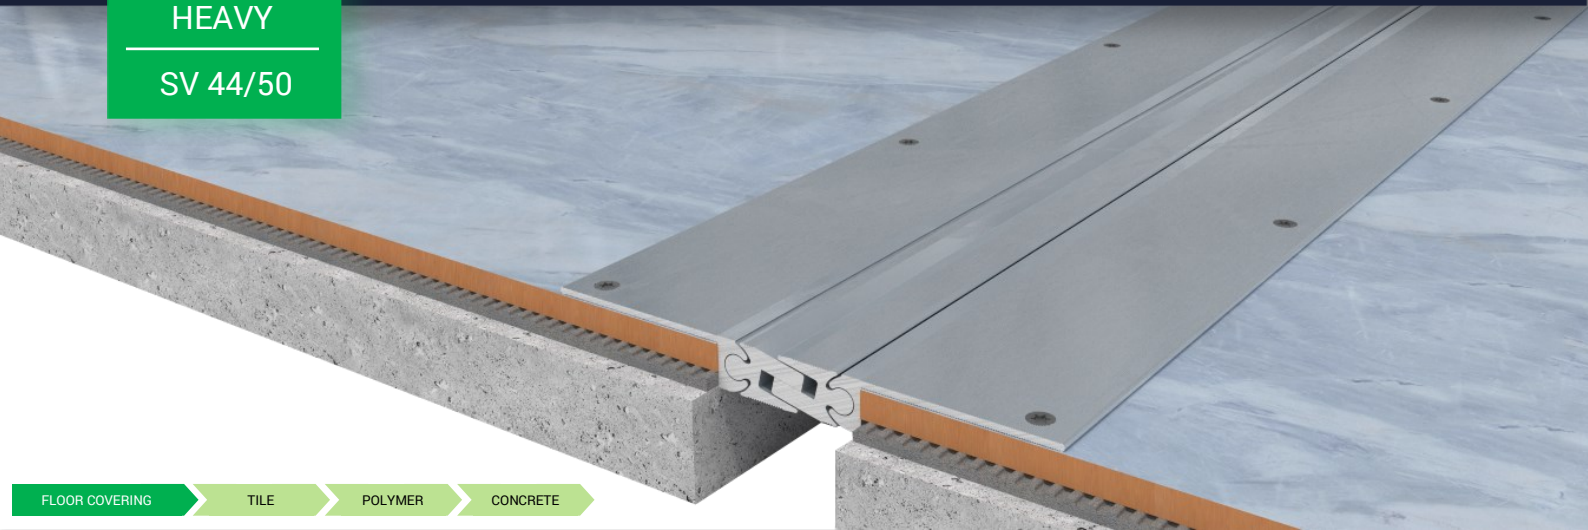

FLOOR COVERING → TILE → POLYMER → CONCRETE

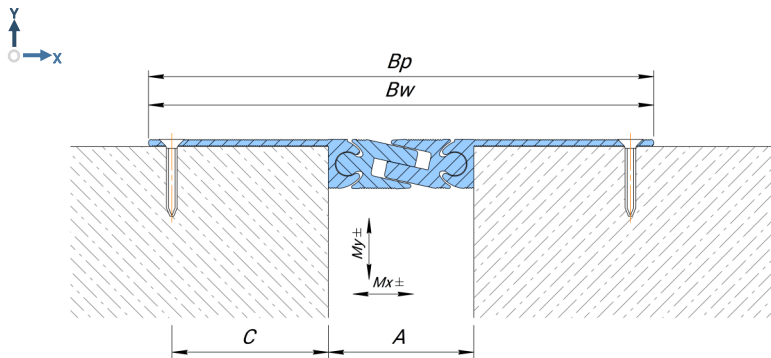

### Technical data

**MATERIAL**  
Aluminium EN AW 6060T6

---

**LENGTH**  
3 meters

---

**STANDARD COLOR**  
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 44/50/N	50	167	167	14	2,3	50	10 (+5/-5)	10 (+5/-5)	30 <sup>1</sup>	-	-	-

<sup>1</sup> Not for permanent use (requires coordination)

On request

Protective anodizing profile

### Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 44/50/N

