



**DEWMARK
HEAVY**

SV 43/65

Joint width
65 mm

Recess
mounted

Max load
600 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

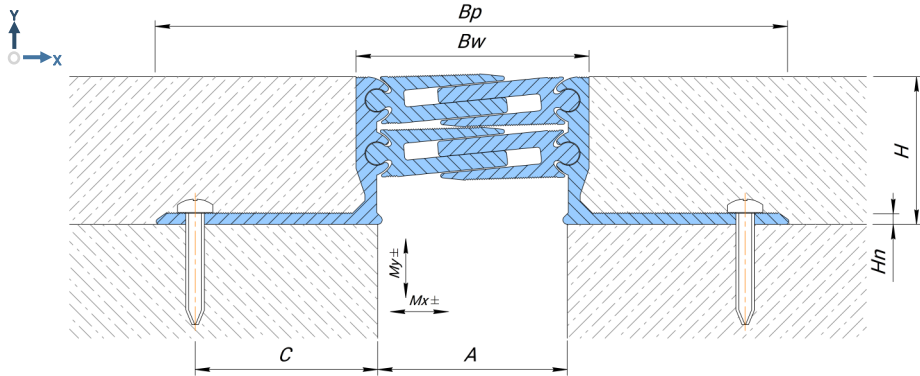

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 43/65/34	65	80	220	34	3	60	24 (+12/-12)	20 (+10/-10)	50 ¹	600 ¹	100 ¹	30 ¹
SV 43/65/50	65	80	215	50	4	60	24 (+12/-12)	20 (+10/-10)	50	600	100	30
SV 43/65/80	65	80	215	80	4	60	24 (+12/-12)	20 (+10/-10)	50	600	100	30

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

On request

Other profile heights on request

Protective anodizing profile