



DEWMARK  
HEAVY

SV 49/45



Joint width  
45 mm



Recess  
mounted



Max load  
100 kN



Movements in  
3 directions



Protection  
rating IP 30




Indoor/  
outdoor



FLOOR COVERING

TILE

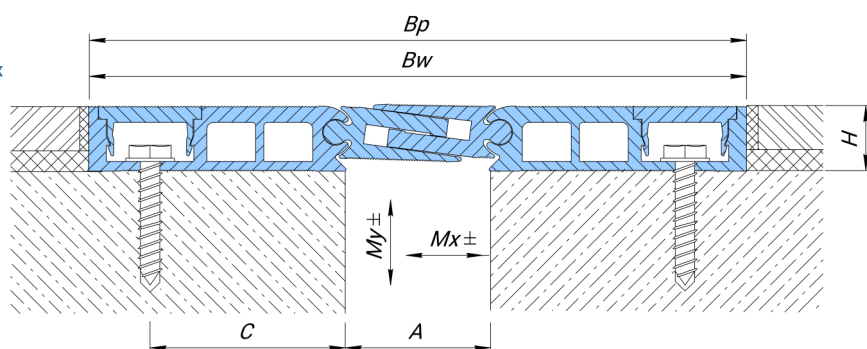

### Technical data

#### MATERIAL

Aluminium EN AW 6060T6

#### LENGTH

3 meters

#### STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 49/45/20	45	205	205	15	3,5	60	14 (+7/-7)	14 (+7/-7)				
									50	100	70	5

! The profile is designed for cases of low installation height and high loads and high traffic. Does not create stress on the finish floor.

On request

Protective anodizing profile

### Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15