



**DEWMARK
HEAVY**

SV 44/120



Joint width
120 mm



Top
mounted



Max load
30 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

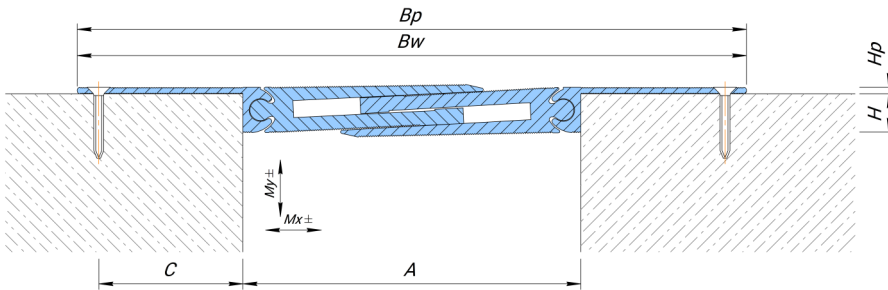

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 44/120/N	120	237	237	14	2,3	50	44 (+22/-22)	40 (+20/-20)	30 ¹	-	-	-

¹ Not for permanent use (requires coordination)

On request

Protective anodizing profile

Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 44/120/N

