



**DEWMARK  
HEAVY**

**SVSS 45/135**



Joint width  
135 mm



Recess  
mounted



Max load  
100 kN



Movements in  
3 directions




Protection  
rating IP 30



Indoor/  
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

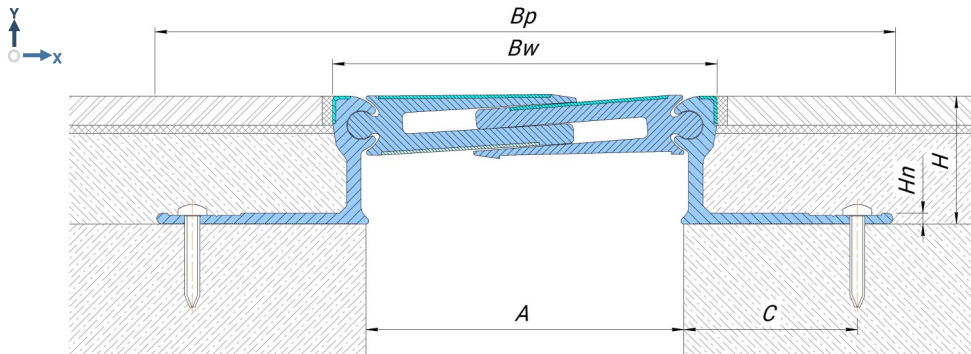

### Technical data

**MATERIAL**

Aluminium EN AW 6060T6,  
Stainless steel AISI 304

**LENGTH**

3 meters

**STANDARD COLOR**

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
<b>SVSS 45/135/53</b>	135	155	285	53	4	70	50 (+25/-25)	50 (+25/-25)	50	100	70	30
<b>SVSS 45/135/80</b>	135	155	300	80	4	70	50 (+25/-25)	50 (+25/-25)	50	100	70	30

### Specifications


The Dewmark Heavy SVSS 45 profile is completed with stainless steel decorative overlays:

AISI 430, AISI 304, AISI 316, AISI 321

Various textures of decorative types of stainless lining can be selected for any interior.

Overlays are fixed on the profile with high-strength glue that is resistant to:

- to negative temperatures down to -40C,
  - aggressive media (including floor cleaning).
- What allows to apply it not only in interiors of rooms, but also out of buildings.

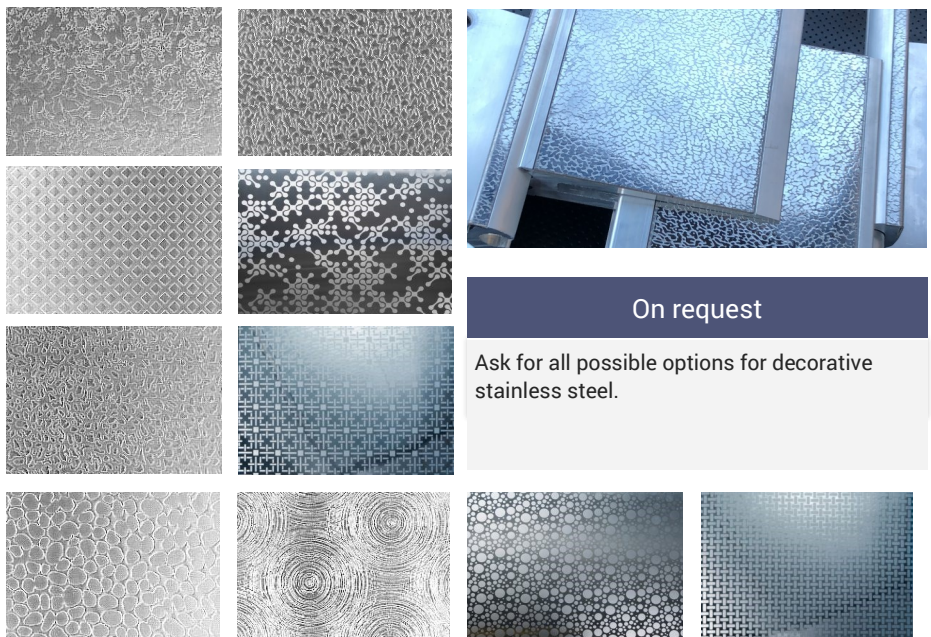

### On request

Ask for all possible options for decorative stainless steel.