



**DEWMARK
HEAVY**

SV 45/135



Joint width
135 mm



Recess
mounted



Max load
600 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

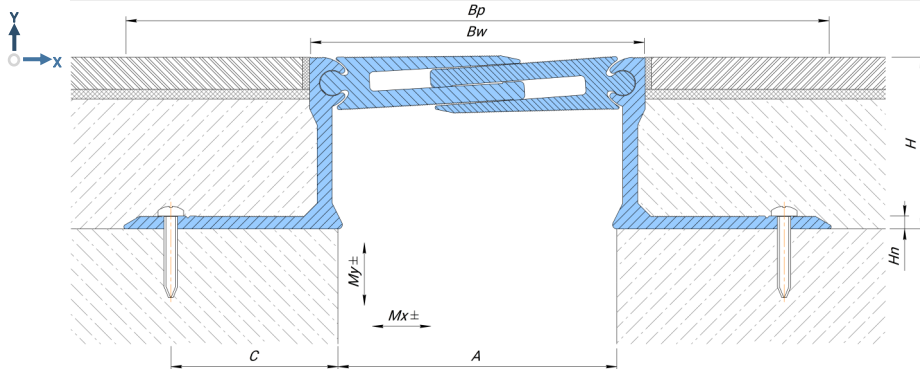

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 45/135/53	135	155	350	53	5	75	54 (+27/-27)	60 (+30/-30)	50	600	100	30
SV 45/135/80	135	155	330	80	6	75	54 (+27/-27)	60 (+30/-30)	50	600	100	30

On request

Other profile heights on request


Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by a corner guide. This profile is denoted by the index "E":

example *SV-E 45/135/80*

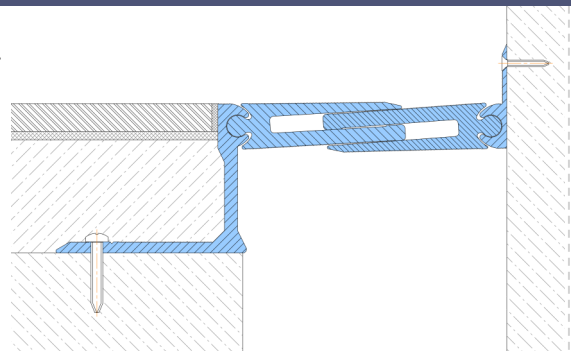

! For corner versions, only pedestrian loads are allowed.