



DEWMARK
STANDART

CRG 33



Recess
mounted



Movements in
3 directions




Protection
rating IP 42



FLOOR COVERING

TILE

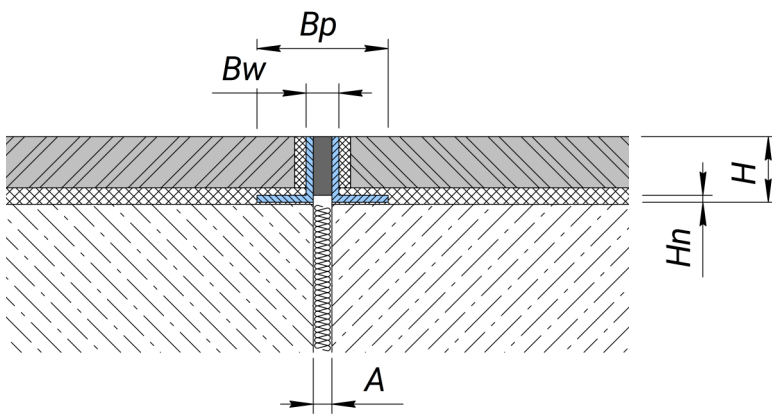

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6 or
inox (on request),
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
CRG 33/10 AL	5	8	25	10	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/12 AL	5	8	29	12	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/15 AL	5	8	35	15	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/20 AL	5	8	35	20	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/25 AL	5	8	35	25	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/30 AL	5	8	35	30	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/10 SS	5	8	25	10	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/12 SS	5	8	29	12	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/15 SS	5	8	35	15	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/20 SS	5	8	35	20	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/25 SS	5	8	35	25	1,5	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 33/30 SS	5	8	35	30	1,5	2 (+1/-1)	2 (+1/-1)	any ¹

¹ Any loads allowed for the floor.

Profile made from:

- Stainless steel - index "SS"
- Aluminum - index "AL"