


Recess
mounted





Joint width
75-500 mm



Movements
in 3 planes



Indoor/
outdoor

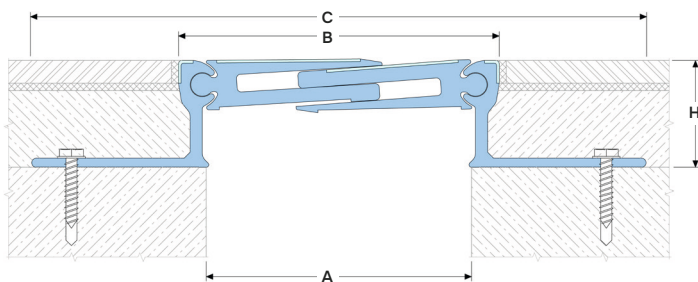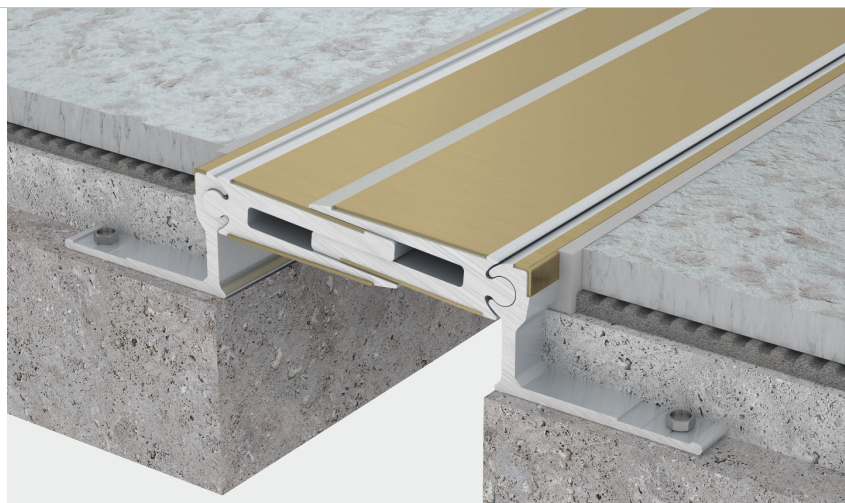

DESIGNATIONS:

A – nominal joint width;
B – visible width;
C – full width (min mounting seat);
H – installation height;
 M_x – horizontal movements;
 M_y – vertical movements;

Profile	Cover type ²	Sizes, mm			Movements, mm		Permissible loads (kN)			
		A ³	B	H ¹	M_x	M_y				
SVSS 45/75/... ¹	BR / SS	75	105	25 / 50 / 75 / 100	30 (+15/-15)	30 (+15/-15)	50	600	70	10
SVSS 45/100/... ¹	BR / SS	100	130	25 / 50 / 75 / 100	40 (+20/-20)	40 (+20/-20)	50	600	70	10
SVSS 45/135/... ¹	BR / SS	135	160	30 / 53 / 80	50 (+25/-25)	50 (+25/-25)	50	600	70	10
SVSS 45/155/... ¹	BR / SS	155	180	30 / 53 / 80	60 (+30/-30)	60 (+30/-30)	50	600	70	10
SVSS 45/200/... ¹	BR / SS	200	220	30 / 53 / 80	60 (+30/-30)	60 (+30/-30)	50	600	70	10

¹... – installation height to choose from standard (see H).

²The cover can be made in a choice of different materials. See "Material and Profile Designation"

³Optional The profile can be manufactured to any joint width up to 500 mm. Please enquire for details.

► TECHNICAL DATA

→ FRAME AND INSERT


Material	Aluminum EN AW 6063 T66	
Tolerances	EN 12020-2:2008	
Strength, MPa	$\sigma_b=250$	
Length, m	3,0	
Tooling	Mounting holes	
Fasteners	Included (Screws Rawlplug R-LX-5x50-HF)	

→ COVER

Material	Brass	AISI 304 ⁴ (1.4301)
Profile designation	BR	SS304-XX
Strength, MPa	$\sigma_b=240$	$\sigma_b=515$
Tolerances	EN 1090-2	EN 1090-2
Length, m	2,5	2,5
Surface coat	Mill finish	Standard surface selection: grind/brushed/polished/textured On request (see "Surface types"): • Colored stainless steel; • Textured stainless steel.

⁴On request, the cover can be made of other types of stainless steel:
AISI 316, 430 or others.

► EQUIPMENT PROFILE

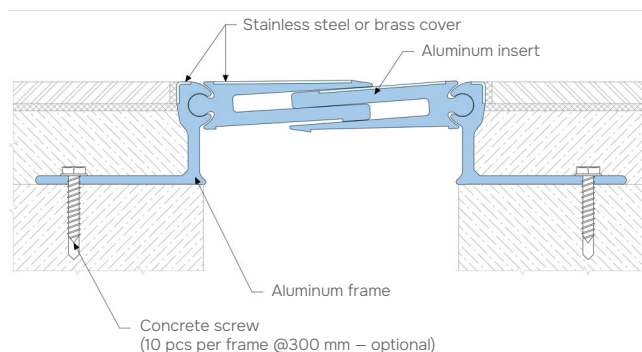

► LABELING

(example)

Profile height (May have a double meaning if a different height version is used – see #3)

Material and material surface of cover


Joint width

SVSS 45/160/100/SS304-4N

Profile Series:
SVSS 45— standard version
SVSS-E 45— marked if required – see “Corner version”

► CORNER VERSION

Profiles have corner versions for Floor-to-wall connections (joint along the wall). These profiles have an index “E”: SV-E.

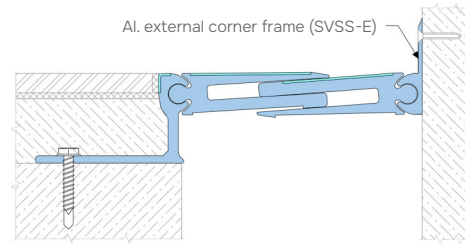


Example: SVSS-E 45/155/80

► EXECUTION OPTIONS


• • •

Using a moisture barrier for waterproofing an expansion joint.

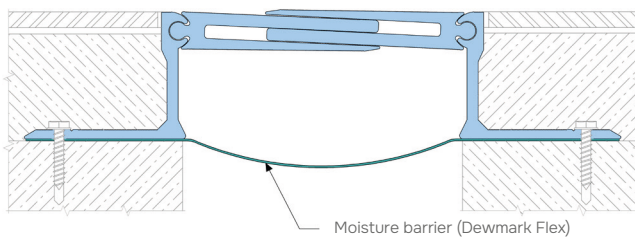

• • •



Use of a fire barrier with a fire resistance rating of up to EI 240.

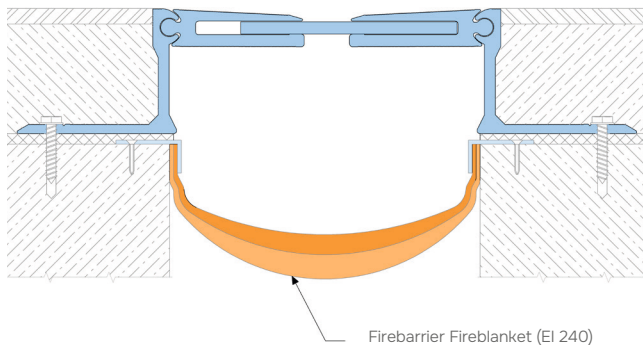

• • •

Different height version of the profile.

Example: SVSS 45/135/80-30

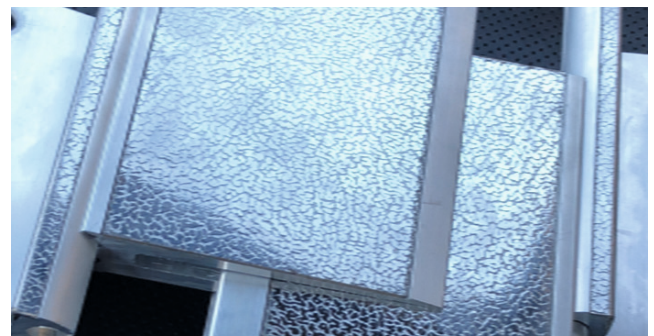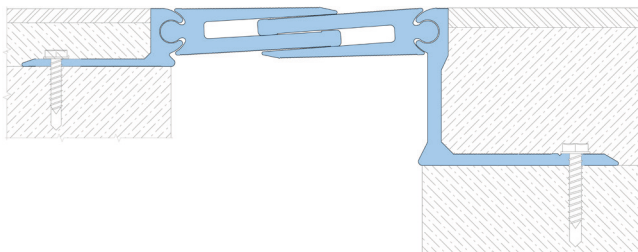

DEWMARK HEAVY

DEWMARK HYDRO

DEWMARK METALL

DEWMARK ROOF

DEWMARK STADIUM

DEWMARK CONTROL

DEWMARK FLEX

DEWMARK FIREGUARD