



DEWMARK  
STANDART

CRG 32



Recess  
mounted



Movements in  
3 directions




Protection  
rating IP 30



FLOOR COVERING

TILE

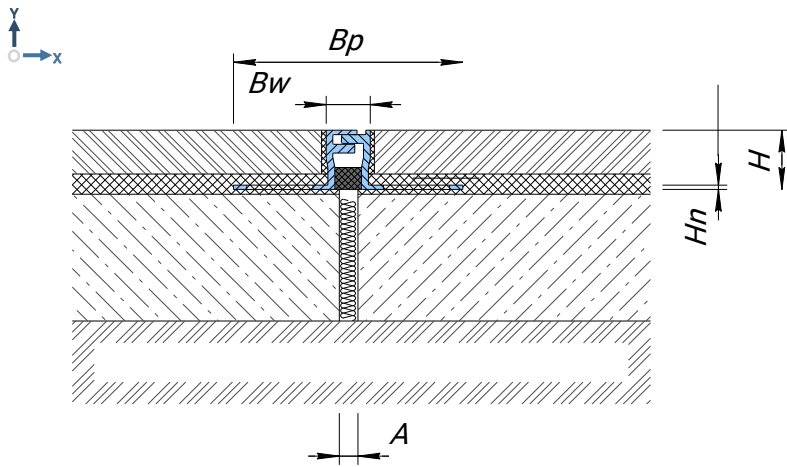

### Technical data

**MATERIAL**

Aluminium EN AW 6060T6

**LENGTH**

3 meters

**STANDARD COLOR**

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
CRG 32/10	6	10	10	10	9	4 (+2/-2)	2 (+1/-1)	any <sup>1</sup>
CRG 32/135	6	10	10	13,5	12,5	4 (+2/-2)	2 (+1/-1)	any <sup>1</sup>
CRG 32/20	6	10	10	20	19	4 (+2/-2)	2 (+1/-1)	any <sup>1</sup>
CRG 32/25	6	10	10	25	23,5	4 (+2/-2)	2 (+1/-1)	any <sup>1</sup>

<sup>1</sup> Any loads allowed for the floor.