



**DEWMARK
HEAVY**

SV 49/80

Joint width
80 mm

Recess
mounted

Max load
100 kN

Movements in
3 directions


Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING

TILE

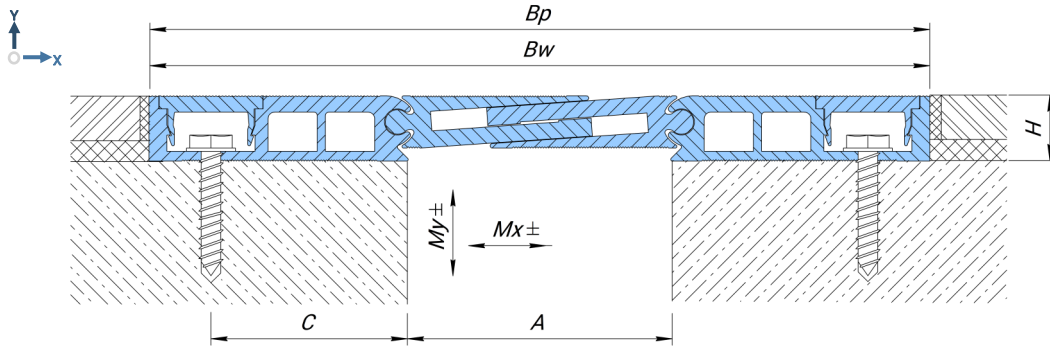

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 49/80/20	80	240	240	15	3,5	60	30 (+15/-15)	34 (+17/-17)	50	100	70	5

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

On request

Protective anodizing profile

! The profile is designed for cases of low installation height and high loads and high traffic. Does not create stress on the finish floor.

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15