



**DEWMARK
HEAVY**

SV 45/270



Joint width
270 mm



Recess
mounted



Max load
300 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

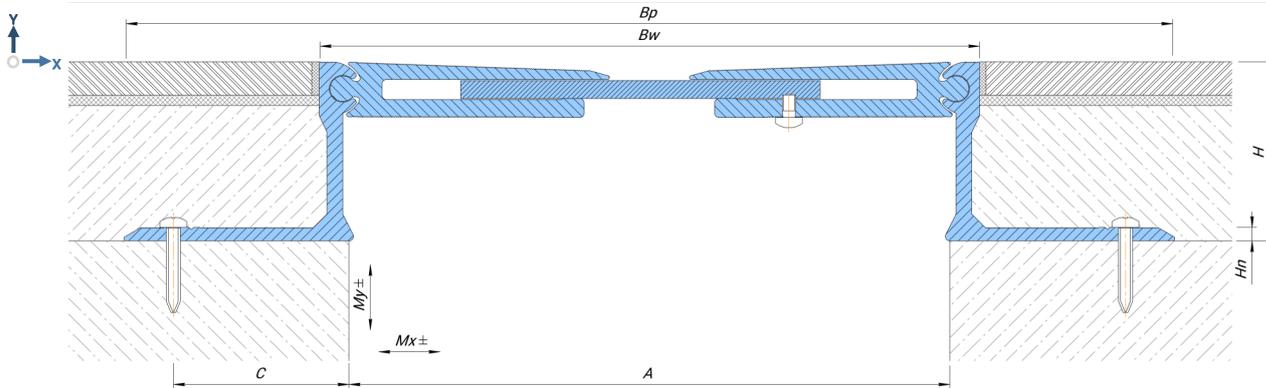

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 45/270/53	270	290	485	53	5	75	70 (+35/-35)	70 (+35/-35)	50	300	100	30
SV 45/270/80	270	290	465	80	6	75	70 (+35/-35)	70 (+35/-35)	50	300	100	30

On request

Other profile heights on request

Protective anodizing profile

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E": *example SV-E 45/270/80*

! For corner versions, only pedestrian loads are allowed.

