



**DEWMARK
HEAVY**

SV 41/155



Joint width
155 mm



Recess
mounted



Max load
30 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

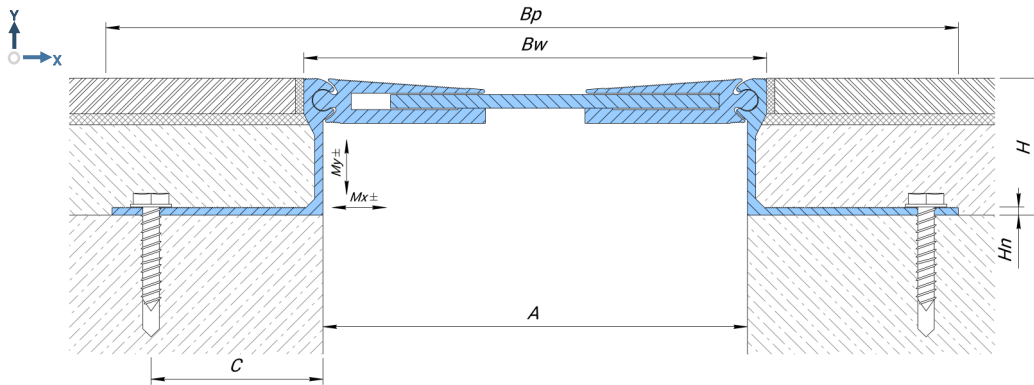

Technical data

MATERIAL	Aluminium EN AW 6060T6
LENGTH	3 meters
STANDARD COLOR	silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 41/155/16	155	170	285	16	2,3	50	30 (+15/-15)	34 (+17/-17)	30 ¹	-	-	-
SV 41/155/20	155	170	304	20	3	60	30 (+15/-15)	34 (+17/-17)	30 ¹	-	-	-
SV 41/155/25	155	170	300	25	3	60	30 (+15/-15)	34 (+17/-17)	30 ¹	-	-	-
SV 41/155/34	155	170	310	34	3	60	30 (+15/-15)	34 (+17/-17)	30 ¹	-	-	-
SV 41/155/50	155	170	308	50	3	60	30 (+15/-15)	34 (+17/-17)	30	-	-	-
SV 41/155/70	155	170	305	70	3,5	60	30 (+15/-15)	34 (+17/-17)	30	-	-	-
SV 41/155/80	155	170	309	80	3,5	60	30 (+15/-15)	34 (+17/-17)	30	-	-	-
SV 41/155/100	155	170	305	100	4	60	30 (+15/-15)	34 (+17/-17)	30	-	-	-
SV 41/155/120	155	170	305	120	4	60	30 (+15/-15)	34 (+17/-17)	30	-	-	-
SV 41/155/150	155	170	313	150	4,5	60	30 (+15/-15)	34 (+17/-17)	30	-	-	-


On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by an corner guide. This profile is denoted by the index "E":
example SV-E 41/155/50

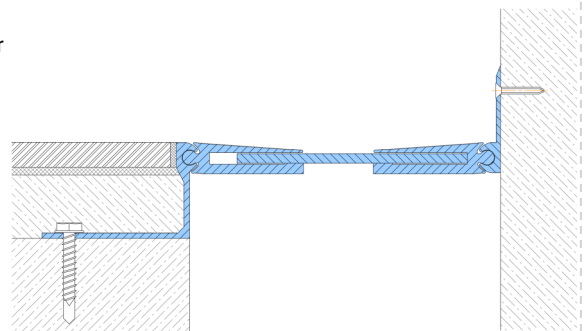

! For corner versions, only pedestrian loads are allowed.