



DEWMARK  
STANDART

SV 23/50

Joint width  
50 mm

Recess  
mounted


Movements in  
6 directions

Protection  
rating IP 52

Indoor/  
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

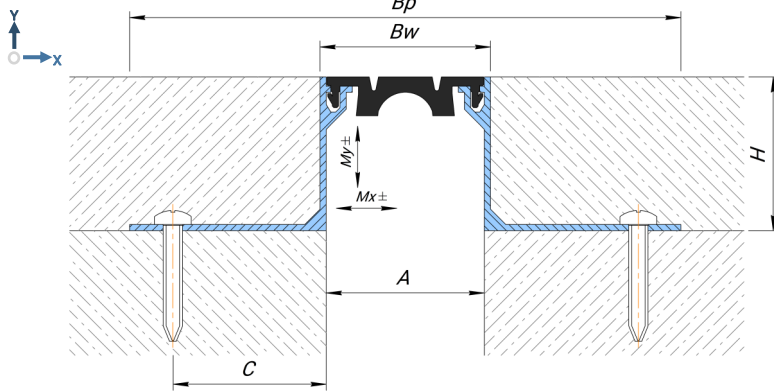

### Technical data

#### MATERIAL

Profile: aluminium EN AW 6060T6,  
Insert: PVC-P

#### LENGTH

3 meters

#### STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 23/50/15	50	55	156	15	40	20 (+10/-10)	10 (+5/-5)	20 <sup>2</sup>	-	-	-
SV 23/50/20	50	55	160	20	40	20 (+10/-10)	10 (+5/-5)	20 <sup>2</sup>	-	-	-
SV 23/50/30	50	55	162	30	40	20 (+10/-10)	10 (+5/-5)	20 <sup>2</sup>	-	-	-
SV 23/50/50	50	55	178	50	40	20 (+10/-10)	10 (+5/-5)	20	-	-	-
SV 23/50/70	50	55	178	70	40	20 (+10/-10)	10 (+5/-5)	20	-	-	-
SV 23/50/H <sup>1</sup>	50	55	O/R	from 70	40	20 (+10/-10)	10 (+5/-5)	20	-	-	-

<sup>1</sup> H - mounting height profile. It is chosen in the range from 70 to 200 mm.

<sup>2</sup> Not for permanent use (requires coordination) - the risk of breaking off the topcoat.

! With heavy traffic, the flexible insert will be subject to wear.

### On request

Profile insert can be made in any color according to RAL (see website [www.ral.de](http://www.ral.de)).

### Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 23/50/50

