



DEWMARK
HEAVY

SV 89

Joint width
50 mm

Recess
mounted

Max load
100 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING TILE

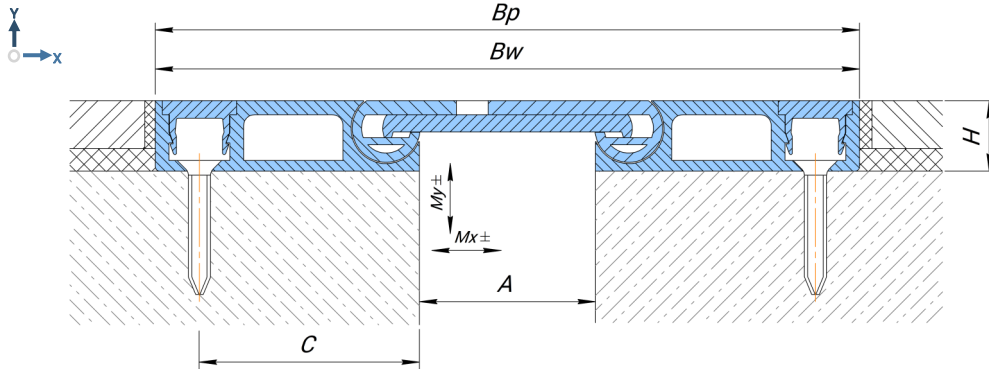

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 89/50/20	50	90	200	20	60	20 (+10/-10)	20 (+10/-10)	50	100	70	5

! The profile is designed for cases of low installation height and high loads and high traffic. Does not create stress on the finish floor.

The unique wavy upper part of the profile allows you to avoid a blow when moving the joint, thereby removing the load from the profile and reducing the dynamic and vibratory impact.

On request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15