



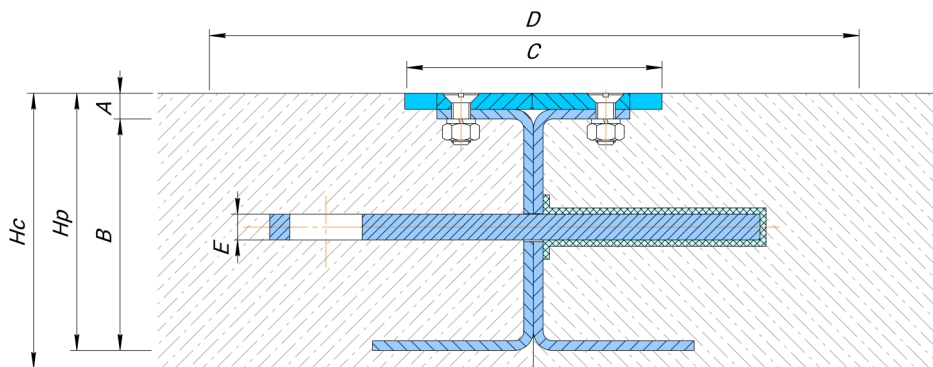

DEWMARK
CONCRETE

SG 63

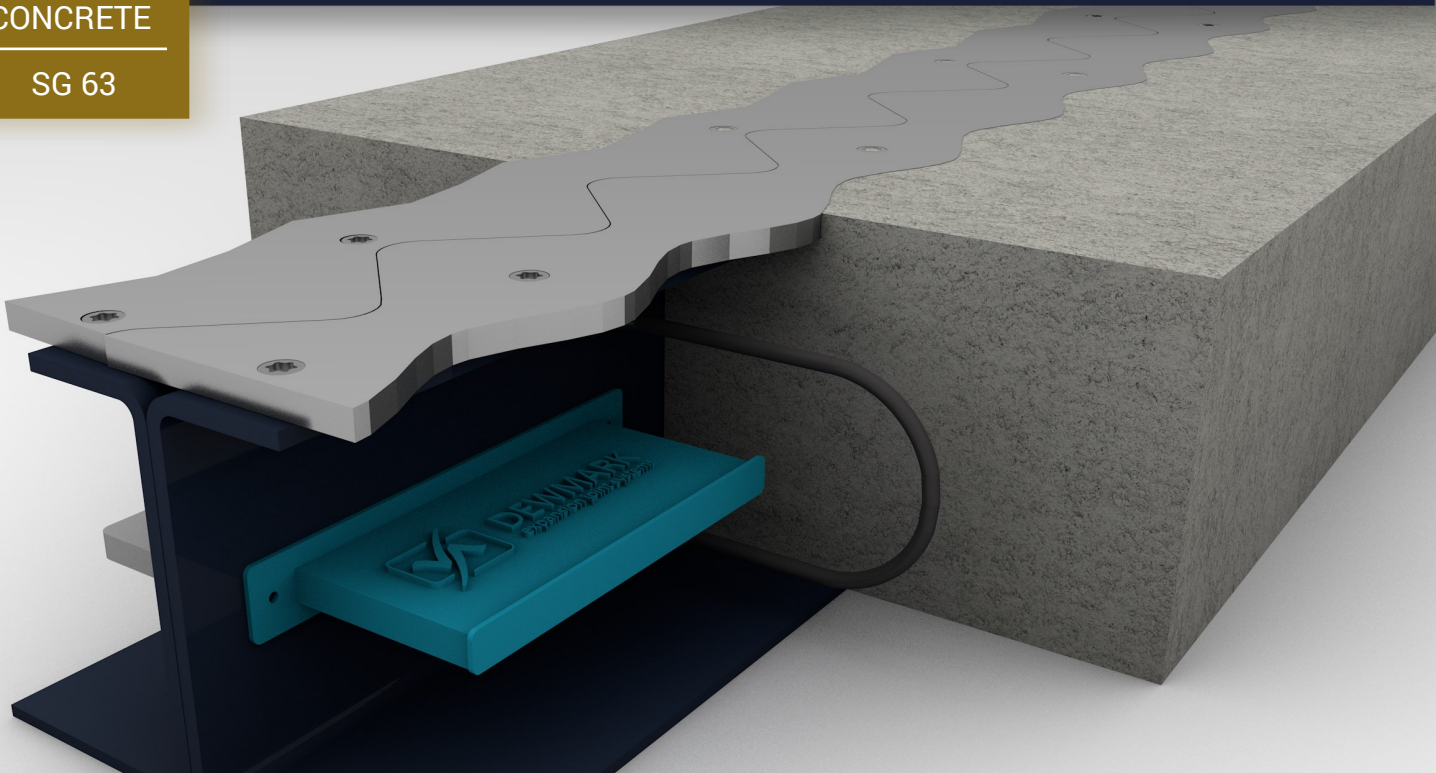

Technical details

MATERIAL
AISI 430, S235J2G3 , ABS plastic

LENGTH
2,5 meter²

COVERING
without protective coating

TREATMENT
Comes assembled

MOVEMENT
Opening of a joint on 25 mm

Profile	Hp (mm)	Hc (mm)	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	Lu (mm)	Lp (mm)	L(mm) ²	Weight/ pcs ³
SG 63/90	90	100-120	8	82	80	220	8	250	— ¹	2400	20,7
SG 63/110	110	125-140	8	102	80	220	8	250	— ¹	2400	22,3
SG 63/130	130	145-160	8	122	80	220	8	250	600	2400	31,0
SG 63/150	150	165-180	8	142	80	220	8	250	600	2400	32,6
SG 63/180	180	185-210	8	172	80	240	8	250	600	2400	34,2
SG 63/210	210	215-240	8	202	80	260	8	250	600	2400	35,8
SG 63/240	240	245-270	8	232	80	260	8	250	600	2400	37,4
SG 63/270	270	275-300	8	262	80	260	8	250	600	2400	39,0

¹ For heights of 90 and 110 mm, the support plates are not fixed. Completed on request.

² Profile length can be changed upon request.

³ Profile weight is approximate.

On request

To order the profile can be made:

- Stainless steel AISI 304
- Hot galvanized profile.

Allowable load

Vehicle type	Allowable weight	Permissible axle load
Car	50 kN	25 kN
Truck	600 kN	110 kN
Pneumatic lift truck	190 kN	110 kN
Plastic Wheel Loader	130 kN	100 kN