



DEWMARK
STANDART

SV 21/20

Joint width
20 mm


Recess
mounted

Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor

FLOOR COVERING → TILE → POLYMER → CONCRETE

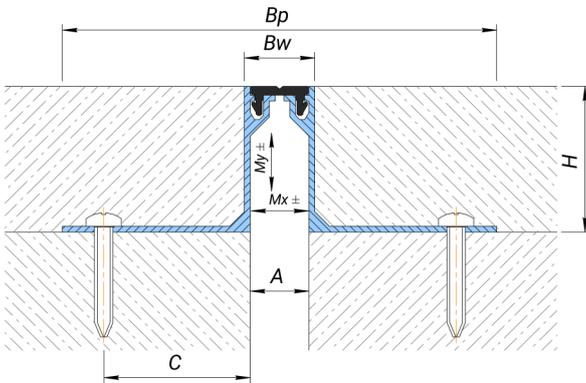

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

| Profile | A (mm) | Bw (mm) | Bp (mm) | H (mm) | C (mm) | Mx (mm) | My (mm) | Load bearing capacity, kN | | | |
|-------------------------|--------|---------|---------|---------|--------|-----------|-----------|---------------------------|------------------|-----------------|---|
| | | | | | | | | | | | |
| SV 21/20/15 | 20 | 24 | 126 | 15 | 40 | 4 (+2/-2) | 4 (+2/-2) | 30 ² | - | - | - |
| SV 21/20/20 | 20 | 24 | 130 | 20 | 40 | 4 (+2/-2) | 4 (+2/-2) | 30 ² | - | - | - |
| SV 21/20/30 | 20 | 24 | 132 | 30 | 40 | 4 (+2/-2) | 4 (+2/-2) | 30 ² | 100 ² | 50 ² | - |
| SV 21/20/50 | 20 | 24 | 148 | 50 | 40 | 4 (+2/-2) | 4 (+2/-2) | 30 | 100 | 50 | - |
| SV 21/20/70 | 20 | 24 | 148 | 70 | 40 | 4 (+2/-2) | 4 (+2/-2) | 30 | 100 | 50 | - |
| SV 21/20/H ¹ | 20 | 24 | O/R | from 70 | 40 | 4 (+2/-2) | 4 (+2/-2) | 30 | 100 | 50 | - |

¹ H - mounting height profile. It is chosen in the range from 70 to 200 mm.

² Not for permanent use (requires coordination) - the risk of breaking off the topcoat.

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in
any color according to RAL
(see website www.ral.de).

Corner version

All profiles have an corner
version (wall to floor under an
angle of 90 degrees).

One of the guides is replaced
by an corner guide.

This profile is denoted by the
index "E": *example SV-E
21/20/50*

