



**DEWMARK
HEAVY**

SV 88


Joint width
50 mm


Recess
mounted


Max load
100 kN

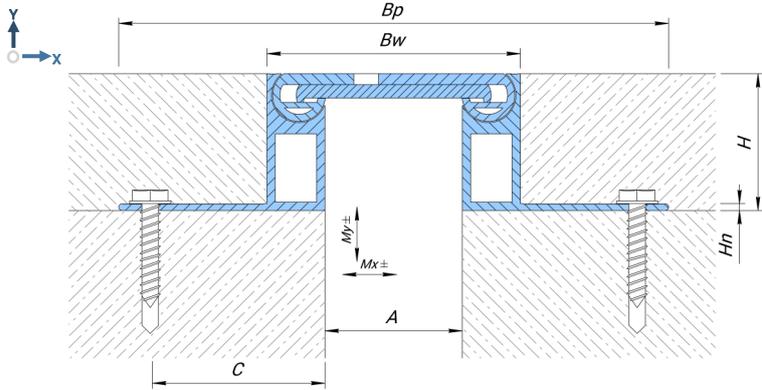

Movements in
3 directions


Protection
rating IP 30


Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE



Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
												
SV 88/50/20	50	90	200	20	3	60	20 (+10/-10)	20 (+10/-10)	50 ¹	100 ¹	70 ¹	5 ¹
SV 88/50/50	50	90	200	50	3	60	20 (+10/-10)	20 (+10/-10)	50	100	70	5

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

! The unique wavy upper part of the profile allows you to avoid a blow when moving the joint, thereby removing the load from the profile and reducing the dynamic and vibratory impact.

On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15