



**DEWMARK
HEAVY**

SV 41/35

Joint width
35 mm

Recess
mounted

Max load
100 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

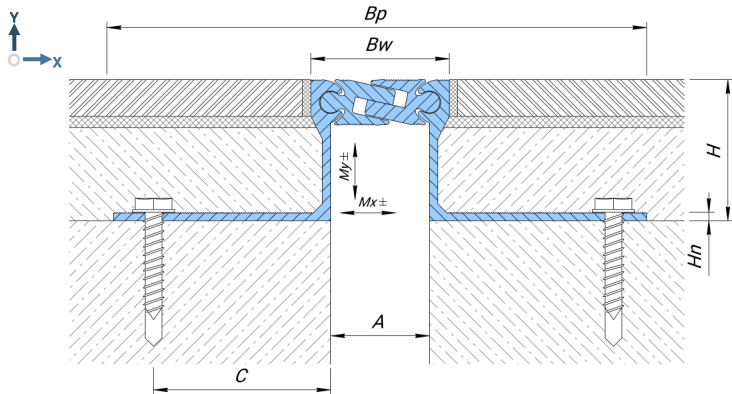

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 41/35/16	35	50	165	16	2,3	50	10 (+5/-5)	10 (+5/-5)	50 ¹	70 ¹	50 ¹	-
SV 41/35/20	35	50	184	20	3	60	10 (+5/-5)	10 (+5/-5)	50 ¹	70 ¹	70 ¹	-
SV 41/35/25	35	50	180	25	3	60	10 (+5/-5)	10 (+5/-5)	50 ¹	100 ¹	70 ¹	5 ¹
SV 41/35/34	35	50	190	34	3	60	10 (+5/-5)	10 (+5/-5)	50 ¹	100 ¹	70 ¹	5 ¹
SV 41/35/50	35	50	188	50	3	60	10 (+5/-5)	10 (+5/-5)	50	100	70	5
SV 41/35/70	35	50	185	70	3,5	60	10 (+5/-5)	10 (+5/-5)	50	100	70	5
SV 41/35/80	35	50	189	80	3,5	60	10 (+5/-5)	10 (+5/-5)	50	100	70	5
SV 41/35/100	35	50	185	100	4	60	10 (+5/-5)	10 (+5/-5)	50	100	70	5
SV 41/35/120	35	50	185	120	4	60	10 (+5/-5)	10 (+5/-5)	50	100	70	5
SV 41/35/150	35	50	193	150	4,5	60	10 (+5/-5)	10 (+5/-5)	50	100	70	5

¹Not for permanent use (requires coordination) - the risk of breaking off the topcoat

On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 41/35/50

