




Inside
mounted






Joint width
20-200 mm



Movements
in 6 directions



Indoor/
outdoor

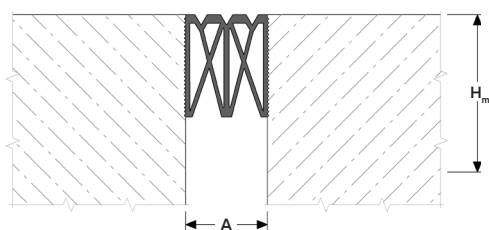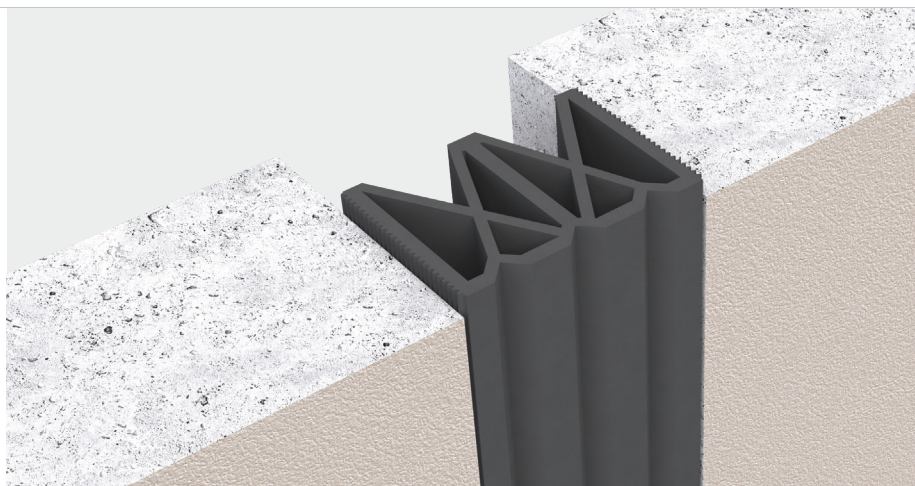

DESIGNATIONS:

A – nominal joint width;
W – profile width;
H_m – installation depth;

M_p – profile height;
M_x – horizontal movements.

Profile	Sizes, mm				Movements, mm
	A	W	H _p	H _m	M _x
AV 17/35	20-30	35	35	40	15 (+5/-10)
AV 17/50	35-40	50	50	55	25 (+10/-25)
AV 17/65	40-50	65	65	75	45 (+15/-30)
AV 17/100	50-85	100	85	100	55 (+25/-30)
AV 17/120	90-110	125	85	100	65 (+20/-45)
AV 17/170	110-150	170	100	120	75 (+25/-50)
AV 17/270	150-200	270	100	120	85 (+30/-55)

► TECHNICAL DATA

Material	Polychloroprene (neoprene)
Standard	ASTM D 2628-91
Strength, psi (MPa)	2000 (13,8)
Length, m	20,0 (per roll)
Physical requirements	See tab.1 ASTM D 2628

► BENEFITS

- Service life 15-25 years
- Resistance to most chemicals used in road construction (fuel, reagents, acid and alkali solutions)
- Temperature range from -40 to +120 degrees Celsius)
- Ease and speed of installation
- All profiles are manufactured in accordance with ASTM D 2628

► DESCRIPTION

Profile Dewmark Wall AV 17 is a specially shaped extruded neoprene de-signed to seal joints in concrete structures to protect them from moisture and dirt. The profile is installed in a compressed form and allows the joint to move in the stated range of movement.

