



DEWMARK
STANDART

SV 23/65

Joint width
65 mm

Recess
mounted


Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

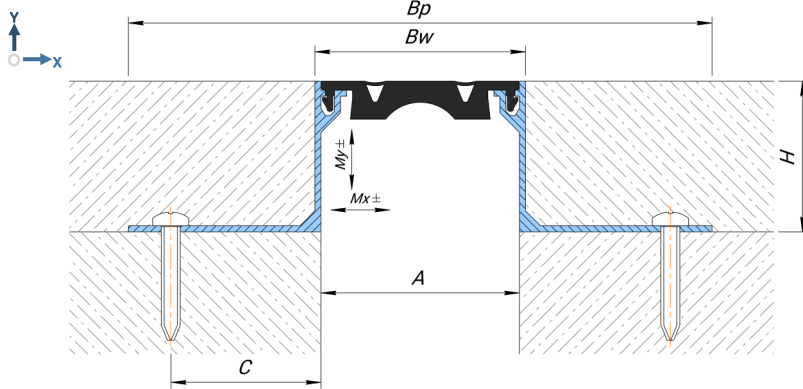

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
SV 23/65/15	65	70	166	15	40	24 (+12/-12)	20 (+10/-10)	pedestrian
SV 23/65/20	65	70	170	20	40	24 (+12/-12)	20 (+10/-10)	pedestrian
SV 23/65/30	65	70	172	30	40	24 (+12/-12)	20 (+10/-10)	pedestrian
SV 23/65/50	65	70	188	50	40	24 (+12/-12)	20 (+10/-10)	pedestrian
SV 23/65/70	65	70	188	70	40	24 (+12/-12)	20 (+10/-10)	pedestrian
SV 23/65/H ¹	65	70	O/R	from 70	40	24 (+12/-12)	20 (+10/-10)	pedestrian

¹ H - mounting height profile. It is chosen in the range from 70 to 200 mm.

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in any color according to RAL (see website www.ral.de).

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 23/65/50

