



**DEWMARK
HEAVY**

SG 32/40

Joint width
40 mm

Top
mounted

Max load
50 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

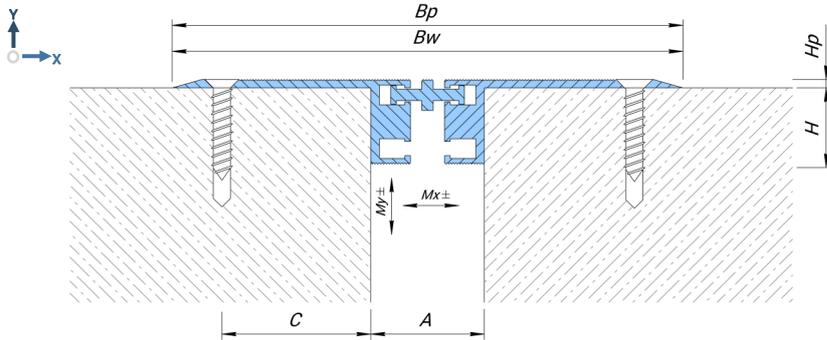

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SG 32/40/N	40	180	180	27	3	50	14 (+7/-7)	4 (+2/-2)	30	50	50	-

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15