



DEWMARK  
STANDART

SV 25/60

Joint width  
60 mm

Recess  
mounted


Movements in  
6 directions

Protection  
rating IP 52

Indoor/  
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

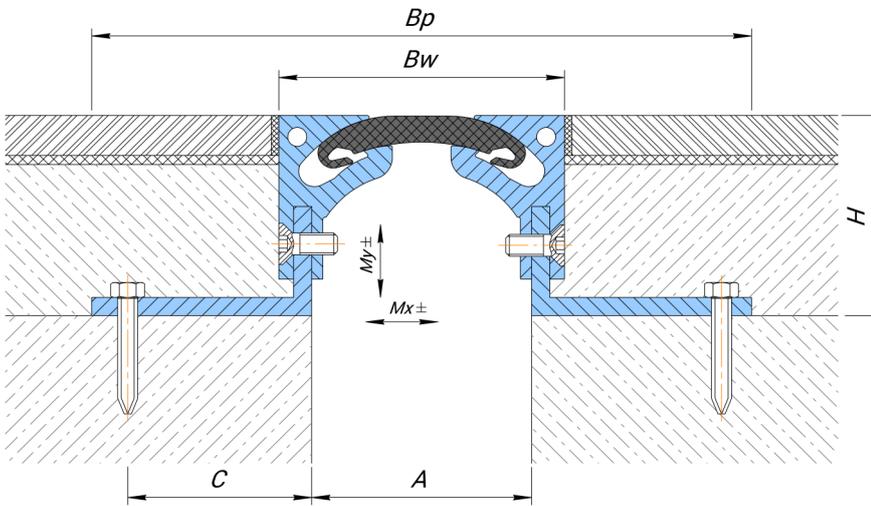

### Technical data

#### MATERIAL

Profile: aluminium EN AW 6060T6,  
Insert: PVC-P

#### LENGTH

3 meters

#### STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 25/50/H	60	78	190	from 55	55	22 (+11/-11)	10 (+5/-5)	50	100	70	20

The profile is made to the required mounting height "H" from 55 mm

#### On request

Profile insert can be made in any color according to RAL (see website [www.ral.de](http://www.ral.de)).