



DEWMARK  
STANDART

SV 21/65

Joint width  
65 mm

Recess  
mounted


Movements in  
6 directions

Protection  
rating IP 52

Indoor/  
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

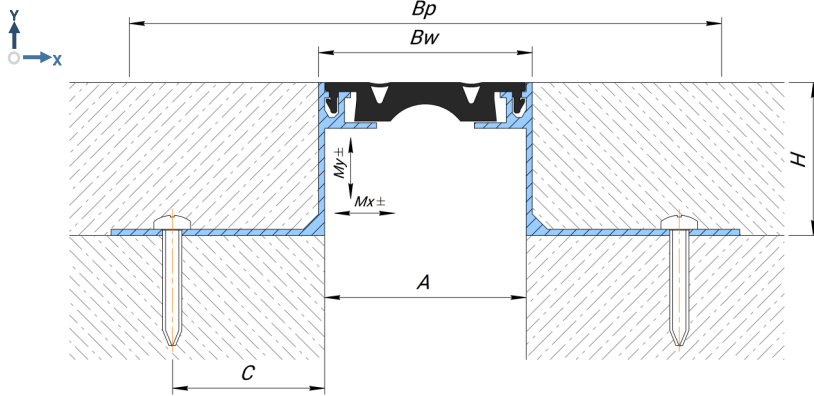

### Technical data

#### MATERIAL

Profile: aluminium EN AW 6060T6,  
Insert: PVC-P

#### LENGTH

3 meters

#### STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 21/65/15	65	70	189	15	40	24 (+12/-12)	20 (+10/-10)	30 <sup>2</sup>	-	-	-
SV 21/65/20	65	70	171	20	40	24 (+12/-12)	20 (+10/-10)	30 <sup>2</sup>	-	-	-
SV 21/65/30	65	70	185	30	40	24 (+12/-12)	20 (+10/-10)	30 <sup>2</sup>	100 <sup>2</sup>	50 <sup>2</sup>	-
SV 21/65/50	65	70	201	50	40	24 (+12/-12)	20 (+10/-10)	30	100	50	-
SV 21/65/70	65	70	189	50	40	24 (+12/-12)	20 (+10/-10)	30	100	50	-
SV 21/65/80	65	70	189	80	40	24 (+12/-12)	20 (+10/-10)	30	100	50	-
SV 21/65/H <sup>1</sup>	65	70	O/R	from 80	40	24 (+12/-12)	20 (+10/-10)	30	-	-	-

<sup>1</sup> H - mounting height profile. It is chosen in the range from 80 to 200 mm.

<sup>2</sup> Not for permanent use (requires coordination) - the risk of breaking off the topcoat.

! With heavy traffic, the flexible insert will be subject to wear.

### On request

Profile insert can be made in any color according to RAL (see website [www.ral.de](http://www.ral.de)).

### Corner version

All profiles have a corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 21/65/15

