




Inside
mounted




Joint width
10-70 mm



Movements
in 6 directions



Indoor/
outdoor

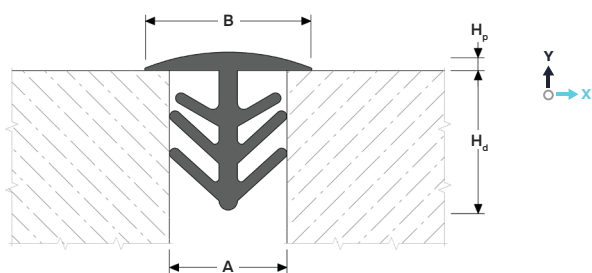

DESIGNATIONS:

A – nominal joint width;
B – visible width;
H_d – installation depth;

M_p – profile height;
M_x – horizontal movements;
M_y – Y-axis movements.

Profile	Sizes, mm				Movements, mm
	A'	B	H _d	H _p	M _x
AV 18/10	10	25	35	4	10 (+5/-5)
AV 18/20	20	40	30	4	20 (+10/-10)
AV 18/30	30	55	50	4	24 (+12/-12)
AV 18/50	50	75	70	5	40 (+20/-20)
AV 18/70	70	95	90	5	50 (+25/-25)

TECHNICAL DATA

Material PVC-P


Standard ASTM D 2628-91

Strength, MPa $\sigma_s = 13,8$


Length, m 3,0

Tooling Without


Color 9005 7035 7037 1015




AV 18/10




AV 18/20



AV 18/30



AV 18/50



AV 18/70



AV-E 18/20



AV-E 18/30