



**DEWMARK
HEAVY**

SV 49/30

Joint width
30 mm

Recess
mounted

Max load
100 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE

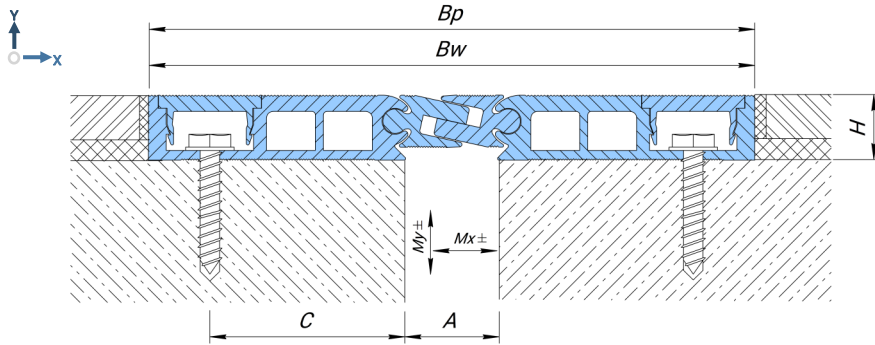

Technical data

| | |
|-----------------------|------------------------|
| MATERIAL | Aluminium EN AW 6060T6 |
| LENGTH | 3 meters |
| STANDARD COLOR | silvery white |

| Profile | A (mm) | Bw (mm) | Bp (mm) | H (mm) | Hp (mm) | C (mm) | Mx (mm) | My (mm) | Load bearing capacity, kN | | | |
|-------------|--------|---------|---------|--------|---------|--------|------------|------------|---------------------------|-----|----|---|
| | | | | | | | | | | | | |
| SV 49/30/20 | 30 | 190 | 190 | 15 | 3,5 | 60 | 10 (+5/-5) | 10 (+5/-5) | 50 | 100 | 70 | 5 |

! The profile is designed for cases of low installation height and high loads and high traffic. Does not create stress on the finish floor.

On request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15