



DEWMARK
STANDART

SV 21/30

Joint width
30 mm

Recess
mounted


Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

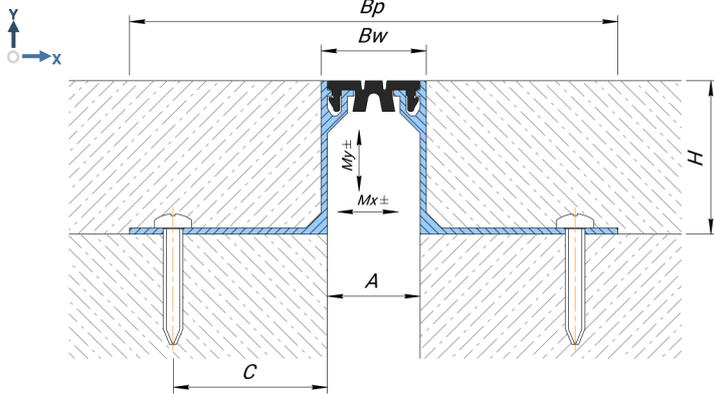

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 21/30/15	30	35	136	15	40	10 (+5/-5)	10 (+5/-5)	30 ²	-	-	-
SV 21/30/20	30	35	140	20	40	10 (+5/-5)	10 (+5/-5)	30 ²	-	-	-
SV 21/30/30	30	35	142	30	40	10 (+5/-5)	10 (+5/-5)	30 ²	100 ²	50 ²	-
SV 21/30/50	30	35	158	50	40	10 (+5/-5)	10 (+5/-5)	30	100	50	-
SV 21/30/70	30	35	158	70	40	10 (+5/-5)	10 (+5/-5)	30	100	50	-
SV 21/30/H ¹	30	35	O/R	from 70	40	10 (+5/-5)	10 (+5/-5)	30	100	50	-

¹ H - mounting height profile. It is chosen in the range from 70 to 200 mm.

² Not for permanent use (requires coordination) - the risk of breaking off the topcoat.

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in
any color according to RAL
(see website www.ral.de).

Corner version

All profiles have an corner
version (wall to floor under an
angle of 90 degrees).

One of the guides is replaced
by an corner guide.

This profile is denoted by the
index "E":

example SV-E 21/30/70

