



**DEWMARK
HEAVY**

SV 42/100



Joint width
100 mm



Top
mounted



Max load
100 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

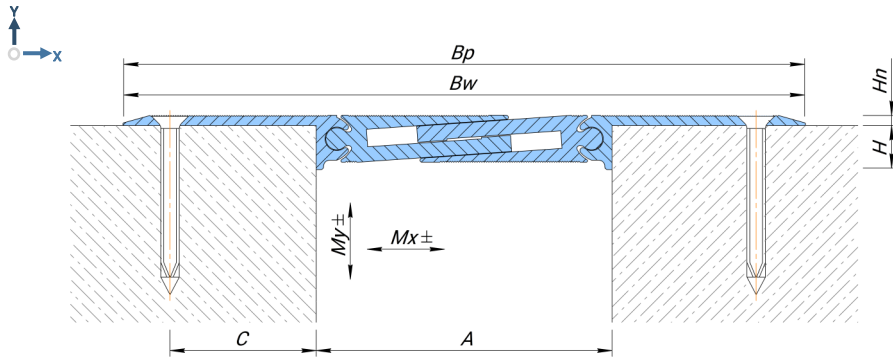

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 42/100/N	100	232	232	15	3,5	50	30 (+15/-15)	34 (+17/-17)	50	100	70	-

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 42/100/N

