



DEWMARK
STANDART

SV 21/25

Joint width
25 mm

Recess
mounted


Movements in
6 directions

Protection
rating IP 52

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

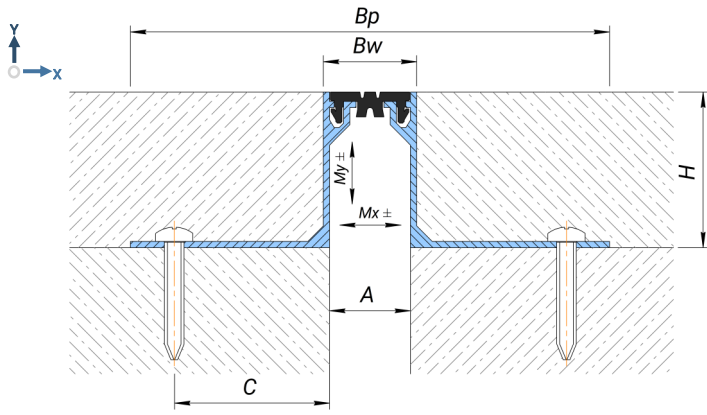

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 21/25/15	25	30	131	15	40	6 (+3/-3)	8 (+4/-4)	30 ²	-	-	-
SV 21/25/20	25	30	135	20	40	6 (+3/-3)	8 (+4/-4)	30 ²	-	-	-
SV 21/25/30	25	30	137	30	40	6 (+3/-3)	8 (+4/-4)	30 ²	100 ²	50 ²	-
SV 21/25/50	25	30	153	50	40	6 (+3/-3)	8 (+4/-4)	30	100	50	-
SV 21/25/70	25	30	153	70	40	6 (+3/-3)	8 (+4/-4)	30	100	50	-
SV 21/25/H ¹	25	30	O/R	from 70	40	6 (+3/-3)	8 (+4/-4)	30	100	50	-

¹ H - mounting height profile. It is chosen in the range from 70 to 200 mm.

² Not for permanent use (requires coordination) - the risk of breaking off the topcoat.

! With heavy traffic, the flexible insert will be subject to wear.

On request

Profile insert can be made in any color according to RAL (see website www.ral.de).

Corner version

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

example SV-E 21/25/20

