



DEWMARK  
STANDART

CRG 34



Recess  
mounted



Movements in  
3 directions




Protection  
rating IP 42



FLOOR COVERING

TILE

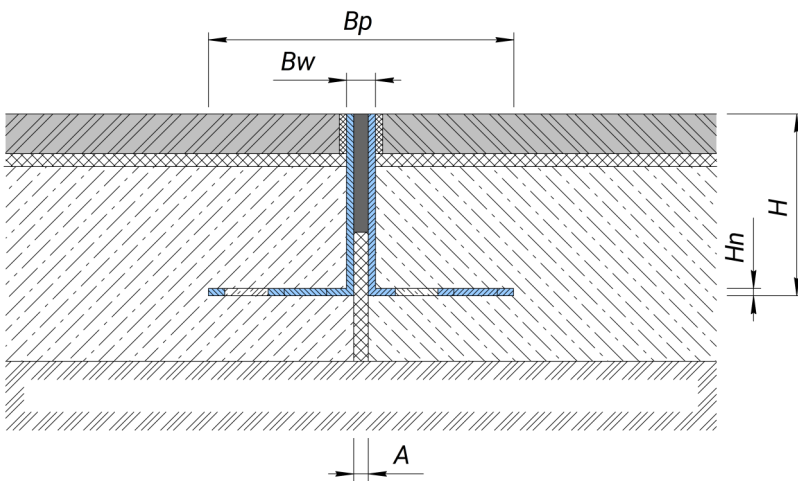

### Technical data

#### MATERIAL

Profile: aluminium EN AW 6060T6 or  
inox (on request),  
Insert: PVC-P

#### LENGTH

3 meters

#### STANDARD COLOR OF INSERT (RAL)

9005

7035

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hn (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
CRG 34/20 AL	5	9	85	20	2	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/25 AL	5	9	85	25	2	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/30 AL	5	9	85	30	2	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/40 AL	5	9	85	40	2	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/50 AL	5	9	85	50	2	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/60 AL	5	9	85	60	2	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/20 SS	5	8	85	20	1,5	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/25 SS	5	8	85	25	1,5	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/30 SS	5	8	85	30	1,5	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/40 SS	5	8	85	40	1,5	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/50 SS	5	8	85	50	1,5	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>
CRG 34/60 SS	5	8	85	60	1,5	2 (+1/-1)	2 (+1/-1)	any <sup>1</sup>

<sup>1</sup> Any loads allowed for the floor.

Profile made from:

- Stainless steel - index "SS"
- Aluminum - index "AL"