



DEWMARK
WALL

AV 20

Joint width
30-300 mm

Top
mounted


Movements in
6 directions

Protection
rating IP 54

Indoor/
outdoor



WALL COVERING TERAZZO STONE BRICK CONCRETE

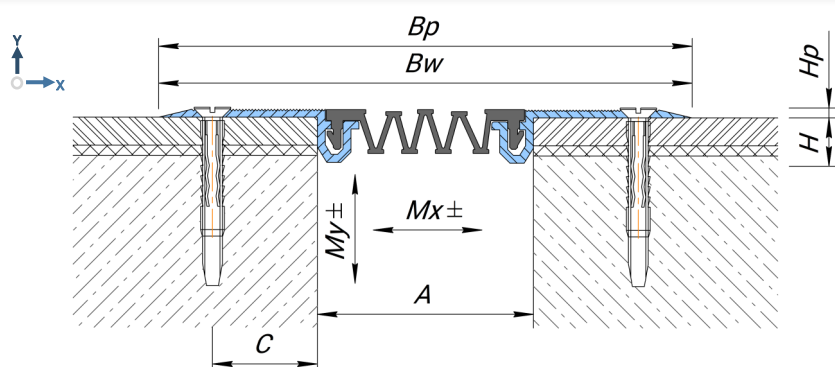

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6,
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

1015


Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)
AV 20/30	30	114	114	10	2	25	20 (+10/-10)	20 (+10/-10)
AV 20/50	50	134	134	10	2	25	40 (+20/-20)	40 (+20/-20)
AV 20/80	80	164	164	10	2	25	60 (+30/-30)	40 (+20/-20)
AV 20/100	100	184	184	10	2	25	70 (+35/-35)	40 (+20/-20)
AV 20/150	150	234	234	10	2	25	100 (+50/-50)	60 (+30/-30)
AV 20/200	200	284	284	10	2	25	200 (+100/-100)	100 (+50/-50)
AV 20/300	300	384	384	10	2	25	300 (+150/-150)	200 (+100/-100)

Corner version

All profiles have an corner version (wall to wall, wall to floor, wall to ceiling under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E": *example AV-E 20/50*

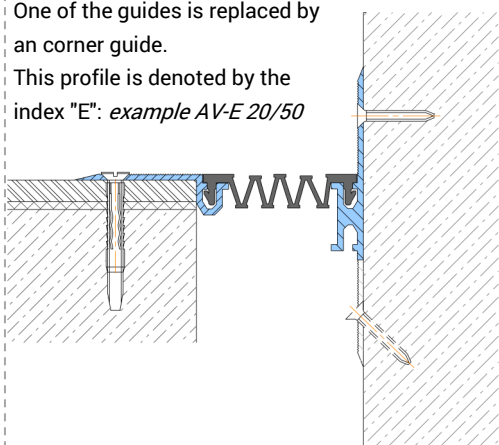

On request

On request, the profile can be:

- Painted insert in any RAL color (see website www.ral.de).
- Profile guides can be painted according to RAL.
- Made of any width of an expansion joint.

