



**DEWMARK
METALL**

SG 84

Joint width
10 mm


Recess
mounted

Max load
600 kN


Movements in
1 directions

Protection
rating IP 30

Indoor/
outdoor

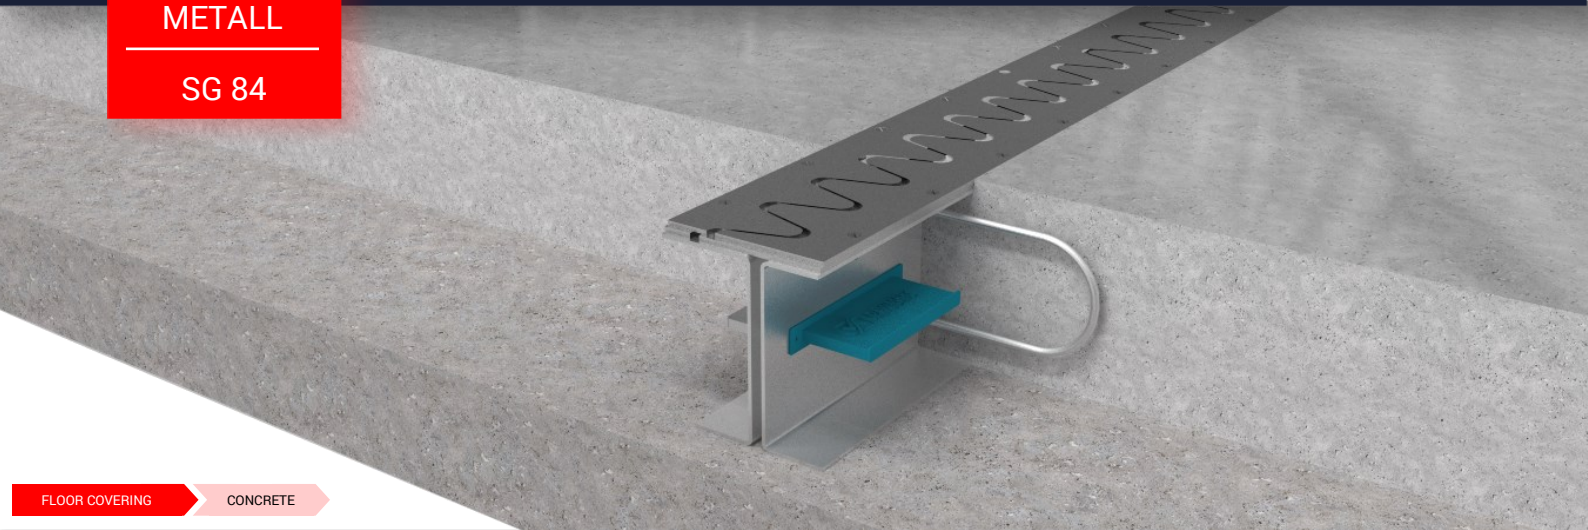

FLOOR COVERING CONCRETE

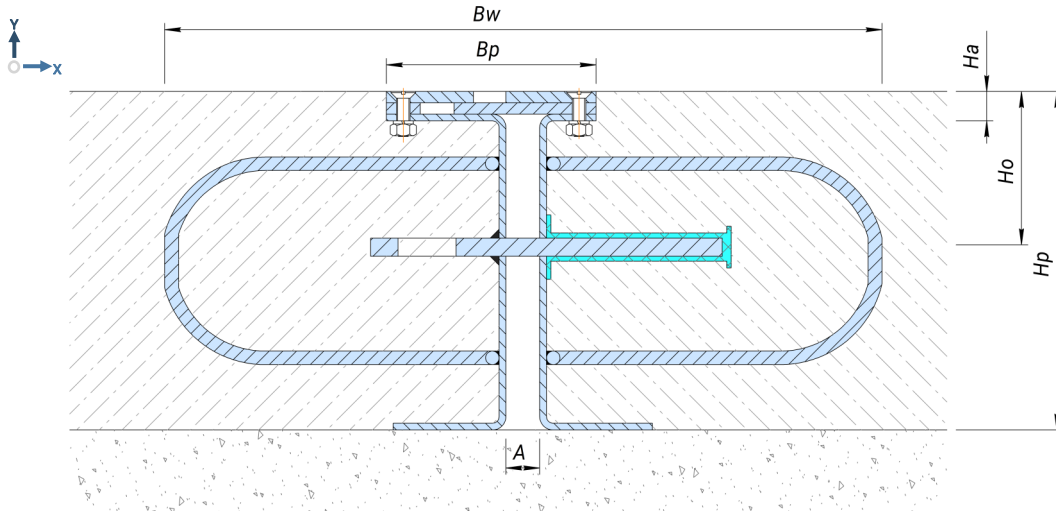

Technical data

MATERIAL

Upper sinus: AISI 430
Profile guide: S235 Steel
ABS-plastic

LENGTH

2.48 meters

STANDARD COLOR (RAL)

matte gray

Profile	A (mm)	Hp (mm)	Bw (mm)	Bp (mm)	Ha (mm)	Ho (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SG 84/10/80	10	80	220	95	13	55	20 (+10/-10)	-	50	600	100	50
SG 84/10/100	10	100	220	95	13	55	20 (+10/-10)	-	50	600	100	50
SG 84/10/120	10	120	220	95	13	60	20 (+10/-10)	-	50	600	100	50
SG 84/10/150	10	150	220	95	13	75	20 (+10/-10)	-	50	600	100	50
SG 84/10/200	10	200	220	95	13	75	20 (+10/-10)	-	50	600	100	50
SG 84/10/300	10	300	220	95	13	75	20 (+10/-10)	-	50	600	100	50

Profile assembly

The profile is supplied complete.

On request

On request, the values of movements may be different.

Another height profile.

Pay attention

For continuous operation, periodic profile cleaning is recommended. The accumulation of dirt leads to the breakdown of the profile.