



DEWMARK
HEAVY

SV 47

Joint width
350-1000 mm

Recess
mounted

Max load
100 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

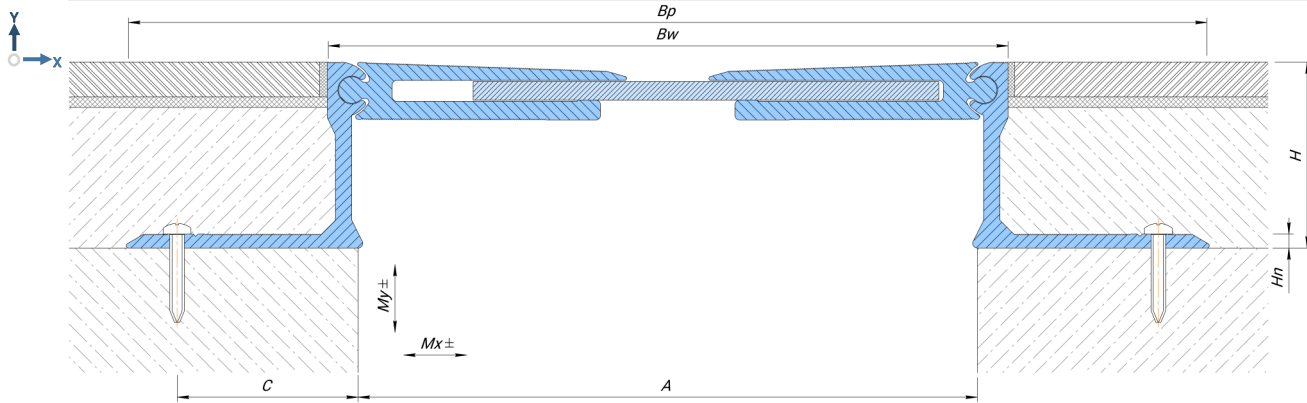

Profile	A ¹ (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 47/A ¹ /53	O/R	O/R	O/R	53	5	75	80 (+40/-40)	80 (+40/-40)	50	100	50	10
SV 47/A ¹ /80	O/R	O/R	O/R	80	6	75	80 (+40/-40)	80 (+40/-40)	50	100	50	10

¹ The profile is selected on a specific width of the expansion joint "A" from 350 to 1000 mm.

On request

Other profile heights on request

Protective anodizing profile

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E": *example SV-E 47/A/80*

! For corner versions, only pedestrian loads are allowed.

