



DEWMARK
HEAVY

SV 45/190



Joint width
190 mm



Recess
mounted



Max load
600 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

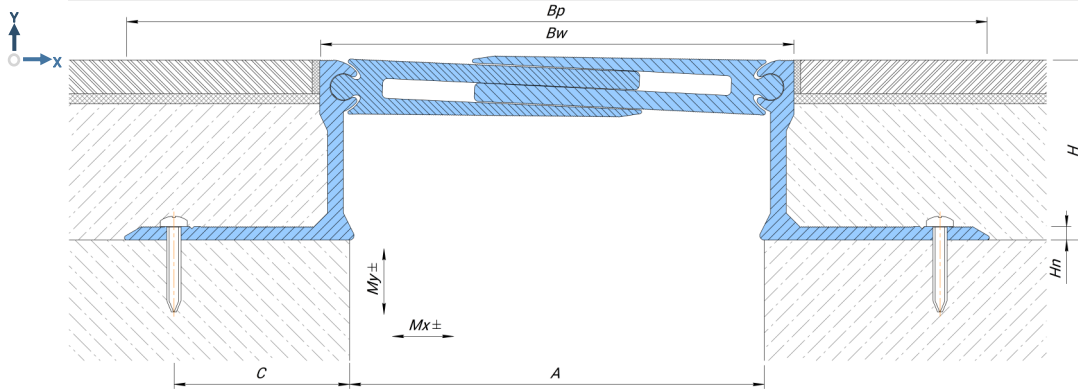

Technical data

MATERIAL	Aluminium EN AW 6060T6
LENGTH	3 meters
STANDARD COLOR	silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 45/190/53	190	210	405	53	5	75	80 (+40/-40)	80 (+40/-40)	50	600	100	30
SV 45/190/80	190	210	385	80	6	75	80 (+40/-40)	80 (+40/-40)	50	600	100	30

On request

Other profile heights on request

Protective anodizing profile

Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by an corner guide.

This profile is denoted by the index "E": *example SV-E 45/190/80*

! For corner versions, only pedestrian loads are allowed.

