



DEWMARK WALL

AV 19

Joint width  
30-300 mm

Recess  
mounted


Movements in  
6 directions

Protection  
rating IP 54

Indoor/  
outdoor



WALL COVERING    TERAZZO    STONE    BRICK    CONCRETE    VENTFACADE

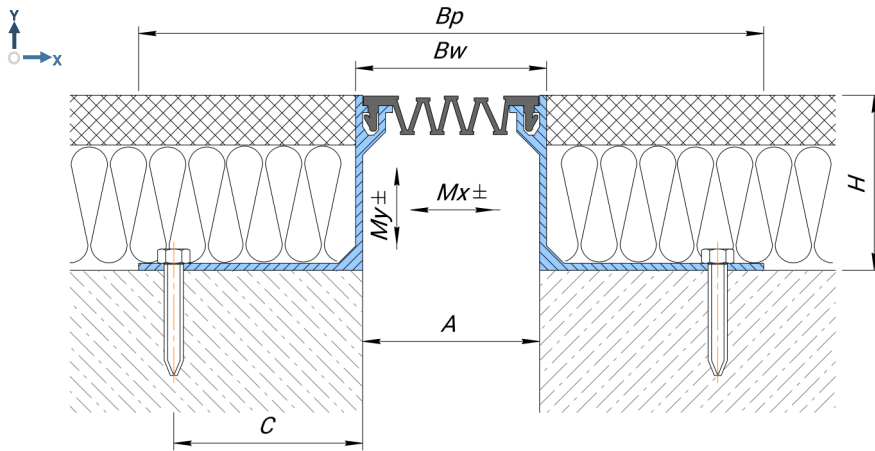

### Technical data

**MATERIAL**

Profile: aluminium EN AW 6060T6,  
Insert: PVC-P

**LENGTH**

3 meters

**STANDARD COLOR OF INSERT (RAL)**

9005	7035	1015
------	------	------

### On request

- Painted insert in any RAL color (see website [www.ral.de](http://www.ral.de)).
- Production of profiles for any width of an expansion joint is possible.


- Insert for 30 mm joint
- Insert for 50 mm joint
- Insert for 80 mm joint
- Insert for 100 mm joint
- Insert for 150 mm joint
- Insert for 200 mm joint

### Corner version

All profiles have an corner version (wall to wall, wall to floor, wall to ceiling under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E": *example AV-E 19/50/50*.

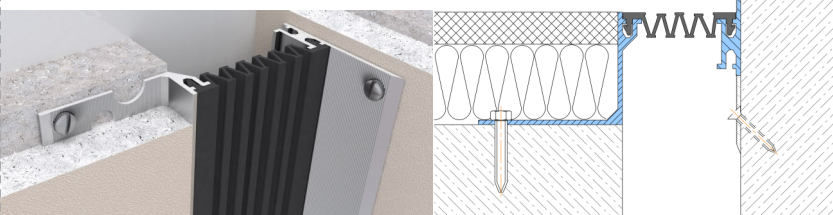



DEWMARK  
WALL

AV 19

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	C (mm)	Mx (mm)	My (mm)
AV 19/30/15	30	34	140	15	40	20 (+10/-10)	20 (+10/-10)
AV 19/30/20	30	34	144	20	40	20 (+10/-10)	20 (+10/-10)
AV 19/30/30	30	34	144	30	40	20 (+10/-10)	20 (+10/-10)
AV 19/30/50	30	34	162	50	40	20 (+10/-10)	20 (+10/-10)
AV 19/30/H <sup>1</sup>	30	34	160	from 65	40	20 (+10/-10)	20 (+10/-10)
AV 19/50/15	50	34	160	15	40	40 (+20/-20)	40 (+20/-20)
AV 19/50/20	50	34	164	20	40	40 (+20/-20)	40 (+20/-20)
AV 19/50/30	50	34	164	30	40	40 (+20/-20)	40 (+20/-20)
AV 19/50/50	50	34	182	50	40	40 (+20/-20)	40 (+20/-20)
AV 19/30/H <sup>1</sup>	50	34	180	from 65	40	40 (+20/-20)	40 (+20/-20)
AV 19/80/15	80	34	190	15	40	60 (+30/-30)	40 (+20/-20)
AV 19/80/20	80	34	194	20	40	60 (+30/-30)	40 (+20/-20)
AV 19/80/30	80	34	194	30	40	60 (+30/-30)	40 (+20/-20)
AV 19/80/50	80	34	212	50	40	60 (+30/-30)	40 (+20/-20)
AV 19/80/H <sup>1</sup>	80	34	210	from 65	40	60 (+30/-30)	40 (+20/-20)
AV 19/100/15	100	34	210	15	40	70 (+35/-35)	40 (+20/-20)
AV 19/100/20	100	34	214	20	40	70 (+35/-35)	40 (+20/-20)
AV 19/100/30	100	34	214	30	40	70 (+35/-35)	40 (+20/-20)
AV 19/100/50	100	34	232	50	40	70 (+35/-35)	40 (+20/-20)
AV 19/100/H <sup>1</sup>	100	34	230	from 65	40	70 (+35/-35)	40 (+20/-20)
AV 19/150/15	150	34	260	15	40	100 (+50/-50)	60 (+30/-30)
AV 19/150/20	150	34	264	20	40	100 (+50/-50)	60 (+30/-30)
AV 19/150/30	150	34	264	30	40	100 (+50/-50)	60 (+30/-30)
AV 19/150/50	150	34	282	50	40	100 (+50/-50)	60 (+30/-30)
AV 19/150/H <sup>1</sup>	150	34	280	from 65	40	100 (+50/-50)	60 (+30/-30)
AV 19/200/15	200	34	310	15	40	200 (+100/-100)	100 (+50/-50)
AV 19/200/20	200	34	314	20	40	200 (+100/-100)	100 (+50/-50)
AV 19/200/30	200	34	314	30	40	200 (+100/-100)	100 (+50/-50)
AV 19/200/50	200	34	332	50	40	200 (+100/-100)	100 (+50/-50)
AV 19/200/H <sup>1</sup>	200	34	330	from 65	40	200 (+100/-100)	100 (+50/-50)
AV 19/300/15	300	34	410	15	40	200 (+100/-100)	100 (+50/-50)
AV 19/300/20	300	34	414	20	40	200 (+100/-100)	100 (+50/-50)
AV 19/300/30	300	34	414	30	40	200 (+100/-100)	100 (+50/-50)
AV 19/300/50	300	34	432	50	40	200 (+100/-100)	100 (+50/-50)
AV 19/300/H <sup>1</sup>	300	34	430	from 65	40	200 (+100/-100)	100 (+50/-50)

H<sup>1</sup> - mounting height profile. It is chosen in the range from 65 to 500 mm (see pic.).  
! On request it is possible to produce profiles for any width of an expansion joint.

