



**DEWMARK
HEAVY**
SV 49/100

Joint width
100 mm


Recess
mounted

Max load
50 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor

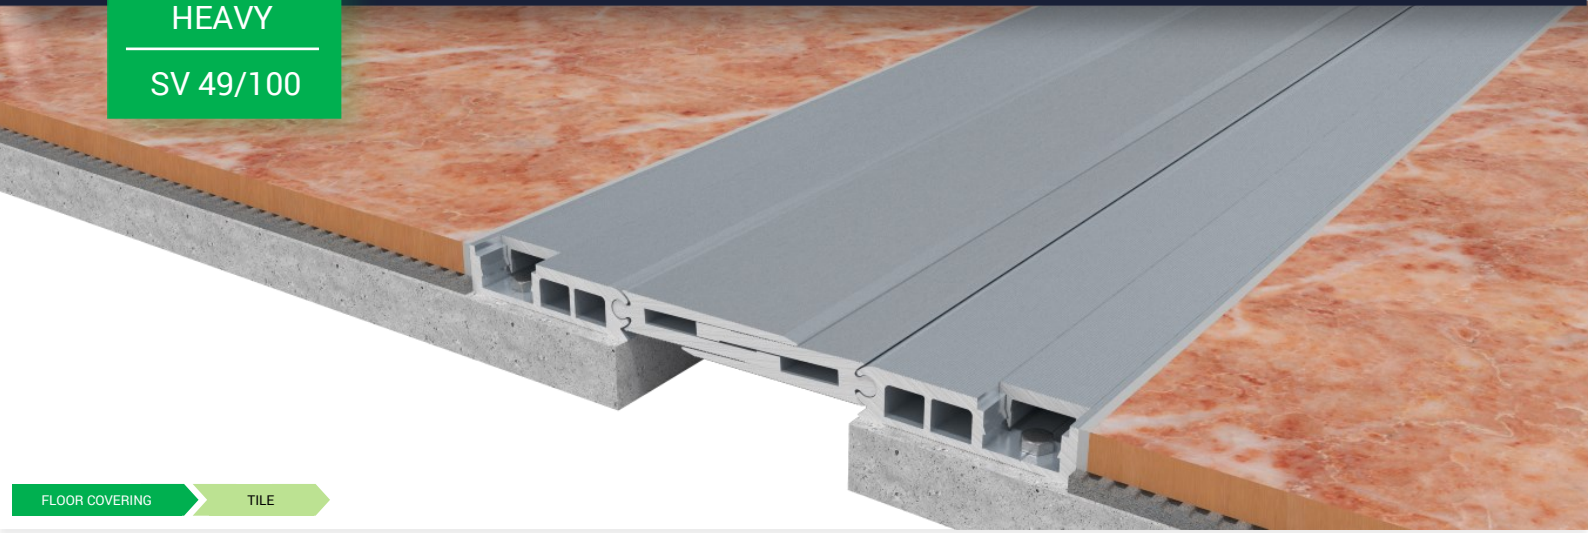

FLOOR COVERING → TILE

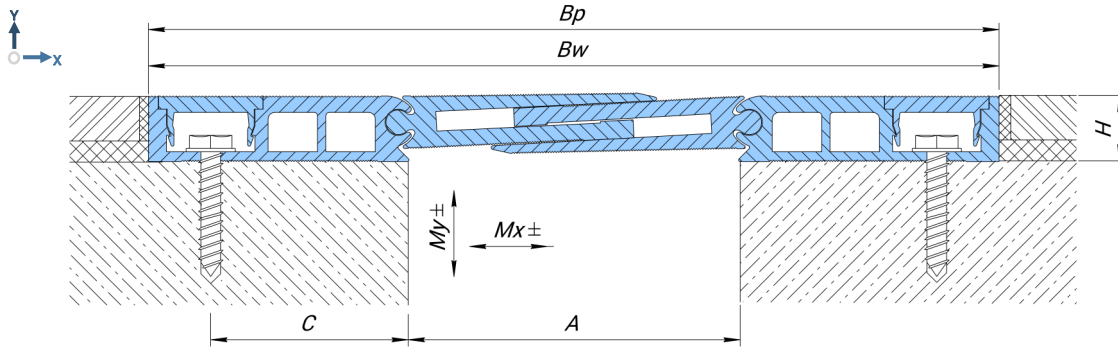

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 49/100/20	100	260	260	15	3,5	60	44 (+22/-22)	40 (+20/-20)	30	50	30	5

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

silvery white

On request

Protective anodizing profile

! The profile is designed for cases of low installation height and high loads and high traffic. Does not create stress on the finish floor.

Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SG-E 31/35/15