



DEWMARK
HEAVY

SG 36



Joint width
10-60 mm



Top
mounted



Max load
300 kN



Movements in
3 directions




Protection
rating IP 30



Indoor/
outdoor

FLOOR COVERING → TILE → POLYMER → CONCRETE

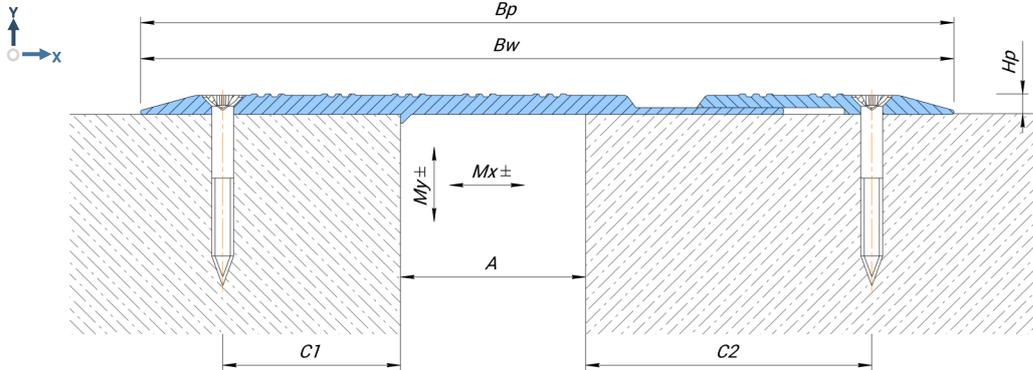

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN								
SG 36/300	10-60	300	300	4	7,5	65	105	44 (+22/-22) ¹	- ²					50	300	50	5

¹ The profile is installed on joint from 10 to 60 mm wide. The maximum allowed movements are indicated.

² Vertical deformations are not allowed.

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile