



DEWMARK
STANDART

SV 14

Joint width
15-120 mm

Top
mounted


Movements in
2 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → LINOLEUM → POLYMER → CONCRETE

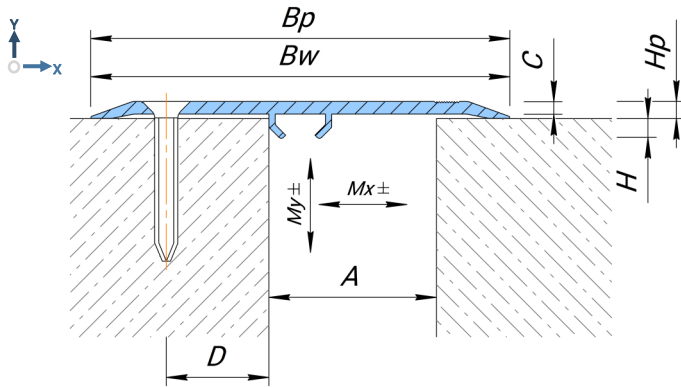

Technical data

MATERIAL

Aluminium EN AW 6060T6

LENGTH

3 meters

STANDARD COLOR

light gray anodized aluminium

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	D (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 14/70	15-25	70	70	5	3	1,5	15	10 (+5/-5)	- ¹	pedestrian			
SV 14/100	15-50	100	100	5	4	3	25	20 (+10/-10)	- ¹	pedestrian			
SV 14/150	15-80	150	150	5	4	3	25	30 (+15/-15)	- ¹	pedestrian			
SV 14/200	0-120	200	200	-	4	2,5	25	50 (+25/-25)	- ¹	pedestrian			
SV 14/200	0-120	200	200	-	4	2,5	25	50 (+25/-25)	- ¹	pedestrian			
Corner versions (joint along the wall)													
SV-E 14/70	15-35	60	60	5	3	1,5	-	10 (+5/-5)	- ¹	pedestrian			
SV-E 14/100	0-75	100	100	-	4	3	-	30 (+15/-15)	- ¹	pedestrian			
SV-E 14/150	0-120	150	150	-	4	2,5	-	50 (+25/-25)	- ¹	pedestrian			

¹ Movement along the Y axis is not allowed.

On request

Painted in any RAL color
(see website www.ral.de).

Anodizing in various colors and textures
(see page decorative anodizing or send a request by e-mail.)

Corner versions

Corner profile example

