



DEWMARK
STANDART

CRG 35



Recess
mounted




Movements in
3 directions



Protection
rating IP 42



FLOOR COVERING TILE

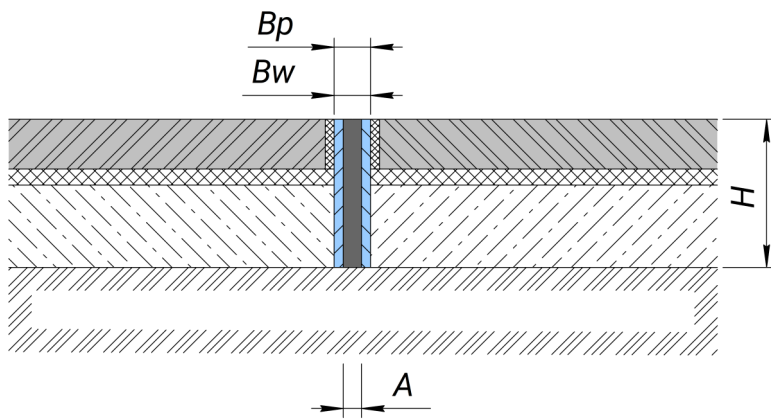

Technical data

MATERIAL

Profile: aluminium EN AW 6060T6 or
inox (on request),
Insert: PVC-P

LENGTH

3 meters

STANDARD COLOR OF INSERT (RAL)

9005

7035

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN
CRG 35/20 AL	5	9	9	20	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/25 AL	5	9	9	25	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/30 AL	5	9	9	30	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/40 AL	5	9	9	40	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/50 AL	5	9	9	50	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/60 AL	5	9	9	60	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/20 SS	5	8	8	20	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/25 SS	5	8	8	25	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/30 SS	5	8	8	30	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/40 SS	5	8	8	40	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/50 SS	5	8	8	50	2 (+1/-1)	2 (+1/-1)	any ¹
CRG 35/60 SS	5	8	8	60	2 (+1/-1)	2 (+1/-1)	any ¹

¹ Any loads allowed for the floor.

Profile made from:

- Stainless steel - index "SS"
- Aluminum - index "AL"