



**DEWMARK
HEAVY**

SV 42/50

Joint width
50 mm

Top
mounted

Max load
100 kN


Movements in
3 directions

Protection
rating IP 30

Indoor/
outdoor



FLOOR COVERING → TILE → POLYMER → CONCRETE

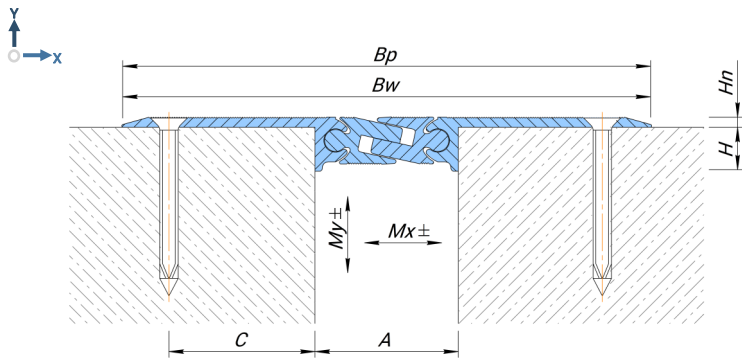

Technical data

MATERIAL
Aluminium EN AW 6060T6

LENGTH
3 meters

STANDARD COLOR
silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 42/50/N	50	182	182	15	3,5	50	10 (+5/-5)	10 (+5/-5)	50	100	70	-

! Plastic and solid wheels are not recommended for use.

On request

Protective anodizing profile

Corner versions

All profiles have a corner version (wall to floor under an angle of 90 degrees). One of the guides is replaced by a corner guide.

This profile is denoted by the index "E":

example SV-E 42/50/N

