



**DEWMARK  
HEAVY**

**SV 49/60**

Joint width  
60 mm

Recess  
mounted

Max load  
100 kN


Movements in  
3 directions

Protection  
rating IP 30

Indoor/  
outdoor



FLOOR COVERING → TILE

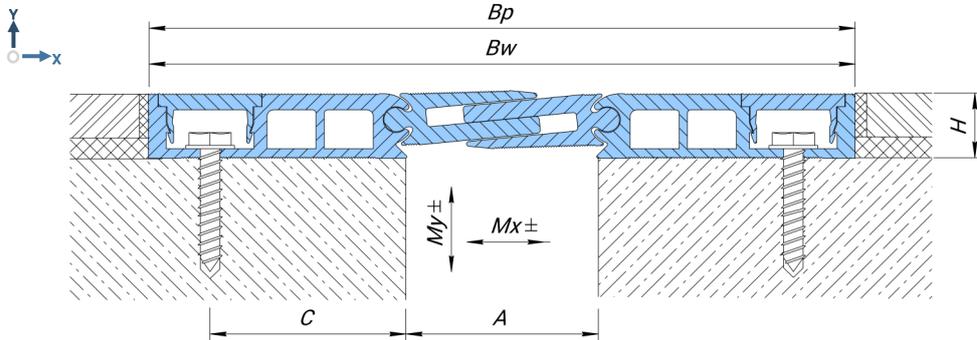

Technical data	
MATERIAL	Aluminium EN AW 6060T6
LENGTH	3 meters
STANDARD COLOR	silvery white

Profile	A (mm)	Bw (mm)	Bp (mm)	H (mm)	Hp (mm)	C (mm)	Mx (mm)	My (mm)	Load bearing capacity, kN			
SV 49/60/20	60	220	220	15	3,5	60	24 (+12/-12)	20 (+10/-10)	50	100	70	5

! The profile is designed for cases of low installation height and high loads and high traffic. Does not create stress on the finish floor.

On request

Protective anodizing profile

### Corner versions

All profiles have an corner version (wall to floor under an angle of 90 degrees).

One of the guides is replaced by an corner guide.

This profile is denoted by the index "E":

*example SG-E 31/35/15*